


# DK1A1B-L2-3V

## **DK1A1B-L2-3V Information**

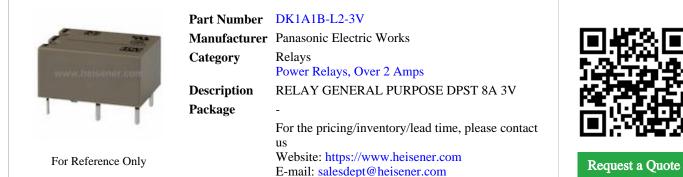

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **DK1A1B-L2-3V** Specifications

ManufacturerPanasonic Electric WorksCategoryRelaysPower Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil VoltageJVDCContact FormDYST-NO/NC (1 Form A and B)Contact Rating (Current)S0VAC, 125VDC - MaxSwitching Voltage (Max).Turn On Voltage (Max).Coperate TimeManufacturedRelease TimeSmsFeaturesSnead - FullyMounting TypeThrough Hole		
CategoryRelaysPackage-Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil VoltageJVDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Min)-Operate TimeMonting TypeFeaturesSaled - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer Part Number	DK1A1B-L2-3V
Power Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate TimeBmsRelease TimeSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Turn Off Voltage (Min)-Operate Time10msRelease TimeSmalFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Category	Relays
SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max).Turn Off Voltage (Min).Operate Time10msRelease TimeSealed - FullyFeaturesSealed - FullyMounting TypePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Turn Off Voltage (Min)-Operate Time10msRelease TimeSealed - FullyFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeLatching, Dual CoilCoil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesScaled - FullyMounting TypeThrough HoleTermination StylePC Pin	Series	DK
Coil Current66.7mACoil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePermination StylePC Pin	Relay Type	General Purpose
Coil Voltage3VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimesSealed - FullyFeaturesSealed - FullyMounting TypeThrough HolePermination StylePC Pin	Coil Type	Latching, Dual Coil
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC PinPC Pin	Coil Current	66.7mA
Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC Pin	Coil Voltage	3VDC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)2.1 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	8A
Turn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 125VDC - Max
Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	2.1 VDC
Release Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
Features Sealed - Fully   Mounting Type Through Hole   Termination Style PC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	8ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

#### **DK1A1B-L2-3V Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# DK1A1B-L2-3V Payment Methods



# **DK1A1B-L2-3V** Shipping Methods



If you have any question about DK1A1B-L2-3V, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com