


DK1A1B-L2-6V

DK1A1B-L2-6V Information

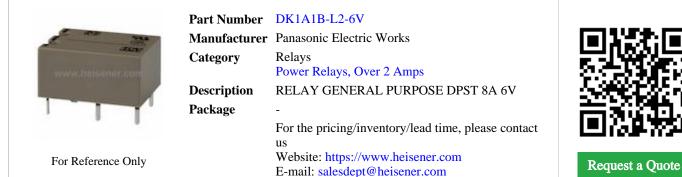

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DK1A1B-L2-6V Specifications

CategoryRelaysPower Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)4.2 VDC - MaxTurn On Voltage (Max)-Qperate Time10msRelease Time8ms		
CategoryRelaysPackage-Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn ON Voltage (Max)-Qoprate TimeMansRelease TimeSmsFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer Part Number	DK1A1B-L2-6V
Power Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Operate Time10msRelease TimeSealed - FullyFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Operate Time10msRelease TimeSmallFeaturesSealed - FullyMounting TypePC Pin	Category	Relays
SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Qperate Time10msRelease TimeSmaleFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)250VAC, 125VDC - MaxTurn On Voltage (Min)-Operate Time10msRelease TimeSealed - FullyFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeLatching, Dual CoilCoil Yupe33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSandel - FullyFeaturesScaled - FullyMounting TypePC Pin	Series	DK
Coil Current33.3mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesScaled - FullyMounting TypeThrough HoleTermination StylePC Pin	Relay Type	General Purpose
Coil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSaled - FullyFeaturesSaled - FullyMounting TypeThrough HolePerinnation StylePC Pin	Coil Type	Latching, Dual Coil
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC PinPC Pin	Coil Current	33.3mA
Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC PinPC Pin	Coil Voltage	6VDC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	8A
Turn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 125VDC - Max
Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	4.2 VDC
Release Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
FeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	8ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

DK1A1B-L2-6V Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DK1A1B-L2-6V Payment Methods



DK1A1B-L2-6V Shipping Methods



If you have any question about DK1A1B-L2-6V, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com