


## **DK1A1B-L2-9V**

#### **DK1A1B-L2-9V Information**

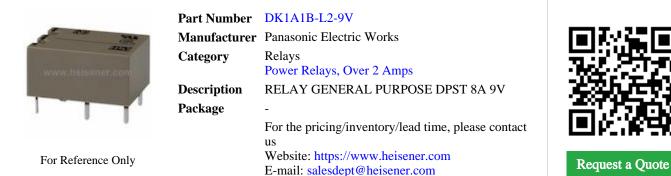

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **DK1A1B-L2-9V** Specifications

Manufacturer Part NumberDK1A1B-L2-9VManufacturerPanasonic Electric WorksCategoryRelaysPackage-Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current2.2mACoil Voltage9VDCContact FormSoVAC, L25VDC - MaxSwitching VoltageSOVAC, 125VDC - MaxTurn On Voltage (Max)-Operate TimeIomsRelease TimeSonacceFaturesSaled - Fully		
CategoryRelaysCategoryFower Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Yotage9VDCContact FormOPST-NO/NC (1 Form A and B)Contact Rating (Current)S0VAC, 125VDC - MaxSwitching Voltage (Max)6.3 VDCTurn On Voltage (Max)-Coperate TimeIomsRelease TimeSeide - Fully	Manufacturer Part Number	DK1A1B-L2-9V
PackagePower Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)6.3 VDCTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSealed - Fully	Manufacturer	Panasonic Electric Works
Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Operate Time10msRelease Time8msFeaturesSeled - Fully	Category	Relays
SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSealed - Fully		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSaid - Fully	Package	-
Coil TypeLatching, Dual CoilCoil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSaidel - Fully	Series	DK
Coil Current22.2mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Relay Type	General Purpose
Coil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesScaled - Fully	Coil Type	Latching, Dual Coil
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Coil Current	22.2mA
Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Coil Voltage	9VDC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)6.3 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Contact Rating (Current)	8A
Turn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - Fully	Switching Voltage	250VAC, 125VDC - Max
Operate Time10msRelease Time8msFeaturesSealed - Fully	Turn On Voltage (Max)	6.3 VDC
Release Time8msFeaturesSealed - Fully	Turn Off Voltage (Min)	-
Features Sealed - Fully	Operate Time	10ms
	Release Time	8ms
	Features	Sealed - Fully
Mounting Type Through Hole	Mounting Type	Through Hole
Termination Style PC Pin	Termination Style	PC Pin
Report errors		Report errors?

#### **DK1A1B-L2-9V Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **DK1A1B-L2-9V Payment Methods**



#### **DK1A1B-L2-9V Shipping Methods**



If you have any question about DK1A1B-L2-9V, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com