


DS1231S-35/T&R

DS1231S-35/T&R Information

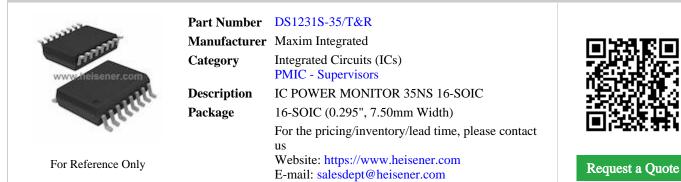

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DS1231S-35/T&R Specifications

ManufacturerMaxim IntegratedCategoryIntegrated Circuits (ICs)PMIC - SupervisorsPackage16-SOIC (0.295", 7.50mm Width)Series-TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)		
CategoryIntegrated Circuits (ICs)PMIC - SupervisorsPackage16-SOIC (0.295", 7.50mm Width)Series-TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold9°C ~ 70°C (TA)Operating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Manufacturer Part Number	DS1231S-35/T&R
PACkagePMIC - SupervisorsPackage16-SOIC (0.295", 7.50mm Width)Series-TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Manufacturer	Maxim Integrated
Package16-SOIC (0.295", 7.50mm Width)Series-TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)	Category	Integrated Circuits (ICs)
Series-TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)		PMIC - Supervisors
TypeSimple Reset/Power-On ResetNumber of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)	Package	16-SOIC (0.295", 7.50mm Width)
Number of Voltages Monitored1OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Series	-
OutputOpen Drain or Open CollectorResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Туре	Simple Reset/Power-On Reset
ResetActive High/Active LowReset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Number of Voltages Monitored	1
Reset Timeout150 ms MinimumVoltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Output	Open Drain or Open Collector
Voltage - Threshold4.37V, 4.62VOperating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Reset	Active High/Active Low
Operating Temperature0°C ~ 70°C (TA)Mounting TypeSurface MountPackage / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Reset Timeout	150 ms Minimum
Mounting Type Surface Mount Package / Case 16-SOIC (0.295", 7.50mm Width) Supplier Device Package 16-SOIC	Voltage - Threshold	4.37V, 4.62V
Package / Case16-SOIC (0.295", 7.50mm Width)Supplier Device Package16-SOIC	Operating Temperature	0°C ~ 70°C (TA)
Supplier Device Package 16-SOIC	Mounting Type	Surface Mount
	Package / Case	16-SOIC (0.295", 7.50mm Width)
Report errors?	Supplier Device Package	16-SOIC
		Report errors?

DS1231S-35/T&R Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DS1231S-35/T&R Payment Methods



DS1231S-35/T&R Shipping Methods



If you have any question about DS1231S-35/T&R, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com