


DSP1-DC9V-F

DSP1-DC9V-F Information

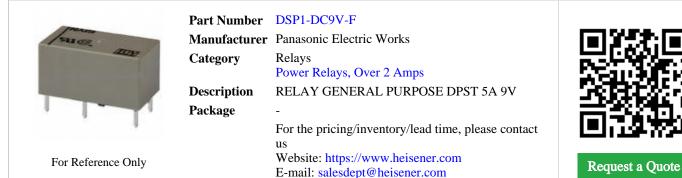

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DSP1-DC9V-F Specifications

CategoryRelaysCategoryPower Relays, Over 2 AmpsPackage-SeriesDSPRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil VoltagePVDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage (Max)7.2 VDCTurn On Voltage (Max)0.9 VDCCurnent0.9 VDCSwitching VoltageSinsRelease TimeSmallFeaturesSealed - FullyMounting TypeThrough Hole		
CategoryRelaysCategoryRelays, Over 2 AmpsPackage-Package-SeriesDSPRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCOperate Time6.9 VDCRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination Style9C Pin	Manufacturer Part Number	DSP1-DC9V-F
Power Relays, Over 2 AmpsPackage-SeriesDSPRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)SASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease TimeSaaled - FullyFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesDSPRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCOperate Time0.9 VDCRelease TimeSmsFeaturesSaidel - FullyMounting TypeChrong HoleTermination StylePC Pin	Category	Relays
SeriesDSPRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)SASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate TimeSmsRelease TimeSmsFeaturesSealed - FullyMounting TypePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage (Max)250VAC, 30VDC - MaxTurn On Voltage (Min)0.9 VDCOperate Time10msRelease TimeSmallFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeNon LatchingCoil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease TimeSmsFeaturesSaidel - FullyMounting TypePC Pin	Series	DSP
Coil Current33.3mACoil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesScaled - FullyMounting TypeThrough HolePremination StylePC Pin	Relay Type	General Purpose
Coil Voltage9VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSaled - FullyMounting TypeThrough HolePrograte TimePC Pin	Coil Type	Non Latching
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HolePC PinPC Pin	Coil Current	33.3mA
Contact Rating (Current)5ASwitching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HolePC Pin	Coil Voltage	9VDC
Switching Voltage250VAC, 30VDC - MaxTurn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)7.2 VDCTurn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	5A
Turn Off Voltage (Min)0.9 VDCOperate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 30VDC - Max
Operate Time10msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	7.2 VDC
Release Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	0.9 VDC
FeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

DSP1-DC9V-F Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DSP1-DC9V-F Payment Methods



DSP1-DC9V-F Shipping Methods



If you have any question about DSP1-DC9V-F, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com