


E-L9338MD

E-L9338MD Information

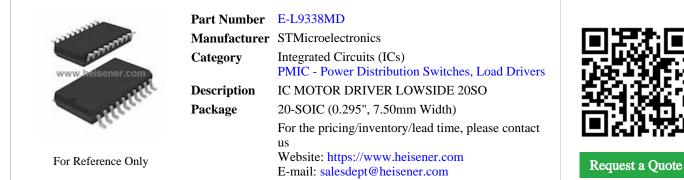

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



E-L9338MD Specifications

Manufacturer STMicroelectronics Category Integrated Circuits (ICs) Package 20-SOIC (0.295", 7.50mm Width) Package 20-SOIC (0.295", 7.50mm Width) Series - Switch Type General Purpose Number of Outputs 4 Ratio - Input:Output 1:1 Output Configuration Low Side Output Type N-Channel Voltage - Load 4.5 V ~ 32 V Voltage - Supply (Vcc/Vdd) Not Required Ratio - Input:Output - Ruft Output (Max) - Rato On (Typ) Non-Inverting Package - Features - Rato On (Typ) Non-Inverting Input Type Non-Inverting Pactures - Features <th></th> <th></th>		
CategoryIntegrated Circuits (ICs)PAckagePMIC - Power Distribution Switches, Load DriversPackage0-SOIC (0.295", 7.50mm Width)Series-Switch TypeGeneral PurposeNumber of Outputs4Ratio - Input:Output1:1Output ConfigurationKow SideOutput TypeNordenaneVoltage - LoadA:5 V ~ 32 VVoltage - Supply (Vcc/Vd)Nor RequiredNordenure-Rds On (Typ)1.7 OhmInput TypeNon-InvertingPactures-Rator Input Symperson-Rds On (Typ)Nor InvertingPactures-Fautures-Package/Case0.9SOIC (0.295", 7.50mm Width)Supplier Device Package0.9SOIC	Manufacturer Part Number	E-L9338MD
PackagePMIC - Power Distribution Switches, Load DriversPackage20-SOIC (0.295", 7.50mm Width)Series-Switch TypeGeneral PurposeNumber of Outputs4Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SOI	Manufacturer	STMicroelectronics
Package20-SOIC (0.295", 7.50mm Width)Series-Switch TypeGeneral PurposeNumber of Outputs4Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredQurrent - Output (Max)-Raton (Typ)1.7 OhmInput TypeNon-InvertingInput TypeOver TemperaturePackage / Case2.0 SOIC (0.295", 7.50mm Width)Supplier Device Package20-SOI	Category	Integrated Circuits (ICs)
Series-Switch TypeGeneral PurposeNumber of Outputs4Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature4.0°C ~ 150°C (TJ)Package / Case20-SOISupplier Device Package20-SOI		PMIC - Power Distribution Switches, Load Drivers
Switch TypeGeneral PurposeNumber of Outputs4Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Falt ProtectionOver TemperatureOperating Temperature40°C ~ 150°C (TJ)Package / Case20-SOI CO.295", 7.50mm Width)Supplier Device Package20-SOI	Package	20-SOIC (0.295", 7.50mm Width)
Number of Outputs4Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature4.0°C ~ 150°C (TJ)Package / Case20-SOISupplier Device Package20-SOI	Series	-
Ratio - Input:Output1:1Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature40°C ~ 150°C (TJ)Package / Case20-SOI (0.295", 7.50mm Width)Supplier Device Package20-SOI	Switch Type	General Purpose
Output ConfigurationLow SideOutput TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Falt ProtectionOver TemperatureOperating Temperature4.0°C ~ 150°C (TJ)Package / CaseSupplier Device PackageSupplier Device Package0-SO	Number of Outputs	4
Output TypeN-ChannelInterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Ratio - Input:Output	1:1
InterfaceOn/OffVoltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Output Configuration	Low Side
Voltage - Load4.5 V ~ 32 VVoltage - Supply (Vcc/Vd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Output Type	N-Channel
Voltage - Supply (Vcc/Vdd)Not RequiredCurrent - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Interface	On/Off
Current - Output (Max)-Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Voltage - Load	4.5 V ~ 32 V
Rds On (Typ)1.7 OhmInput TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Voltage - Supply (Vcc/Vdd)	Not Required
Input TypeNon-InvertingFeatures-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Current - Output (Max)	-
Features-Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Rds On (Typ)	1.7 Ohm
Fault ProtectionOver TemperatureOperating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Input Type	Non-Inverting
Operating Temperature-40°C ~ 150°C (TJ)Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Features	-
Package / Case20-SOIC (0.295", 7.50mm Width)Supplier Device Package20-SO	Fault Protection	Over Temperature
Supplier Device Package 20-SO	Operating Temperature	-40°C ~ 150°C (TJ)
	Package / Case	20-SOIC (0.295", 7.50mm Width)
Report errors?	Supplier Device Package	20-SO
		Report errors?

E-L9338MD Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

CE Servic

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about E-L9338MD, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com