


E2A-M30LS15-WP-B3 5M

E2A-M30LS15-WP-B3 5M Information

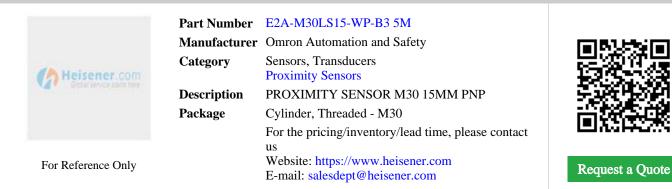

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



E2A-M30LS15-WP-B3 5M Specifications

Manufacturer Part NumberE2A-M30LS15-WP-B3 5MManufacturerOmron Automation and SafetyCategorySensors, TransducersProximity SensorsProximity SensorsPackageCylinder, Threadel - M30SeriesE2ASensor TypeInductiveSensing Distance0.591" (15mm)Output TypeSolvaResponse FrequencySolvaShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating TemperatureHP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30		
CategorySensors, TransducersProximity SensorsPackageProximity SensorsPackageCylinder, Threaded - M30SeriesE2ASensor TypeInductiveSensor Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingNickel-Plated BrassMaterial - Body10 V ~ 32 VVoltage - SupplyCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIEDPackage / CaseCylinder, Threaded - M30	Manufacturer Part Number	E2A-M30LS15-WP-B3 5M
Proximity SensorsPackageCylinder, Threaded - M30SeriesE2ASensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Manufacturer	Omron Automation and Safety
PackageCylinder, Threaded - M30SeriesE2ASensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination Style-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Category	Sensors, Transducers
SeriesE2ASensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination Style-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30		Proximity Sensors
Sensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply0 V ~ 32 VTermination StyleCable LeadsOperating TemperatureH67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Package	Cylinder, Threaded - M30
Sensing Distance0.591" (15mm)Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature140°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Series	E2A
Output TypePNP-NC/NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Sensor Type	Inductive
Response Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Sensing Distance	0.591" (15mm)
NieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Output Type	PNP-NC/NO, 3-Wire
Material - BodyNickel-Plated BrassVoltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Response Frequency	250Hz
Voltage - Supply10 V ~ 32 VTermination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Shielding	Shielded
Termination StyleCable LeadsOperating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Material - Body	Nickel-Plated Brass
Operating Temperature-40°C ~ 70°CIngress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Voltage - Supply	10 V ~ 32 V
Ingress ProtectionIP67, IP69KIndicatorLEDPackage / CaseCylinder, Threaded - M30	Termination Style	Cable Leads
IndicatorLEDPackage / CaseCylinder, Threaded - M30	Operating Temperature	$-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Package / Case Cylinder, Threaded - M30	Ingress Protection	IP67, IP69K
-	Indicator	LED
Report errors?	Package / Case	Cylinder, Threaded - M30
		Report errors?

E2A-M30LS15-WP-B3 5M Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

E2A-M30LS15-WP-B3 5M Payment Methods



If you have any question about E2A-M30LS15-WP-B3 5M, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com