


E2B-M30LS15-WP-B1 2M

E2B-M30LS15-WP-B1 2M Information

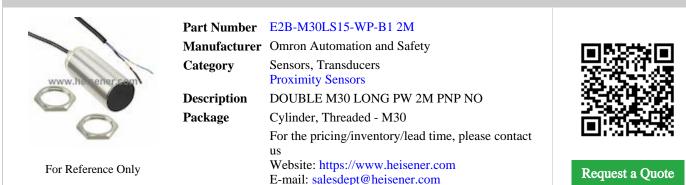

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



E2B-M30LS15-WP-B1 2M Specifications

Manufacturer Part NumberE2B-M30LS15-WP-B1 2MManufacturerOmron Automation and SafetyCategorySensors, TransducersPackageProximity SensorsPackageCylinder, Threaded - M30SeriesE2BSensor TypeInductiveSensing Distance0.591" (15mm)Output Type9NP-NO, 3-WireResponse FrequencyStolededShieldingNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads		
CategorySensors, TransducersProximity SensorsPackageCylinder, Threaded - M30SeriesE2BSensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Manufacturer Part Number	E2B-M30LS15-WP-B1 2M
Proximity SensorsPackageCylinder, Threaded - M30SeriesE2BSensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VFremination StyleCable Leads	Manufacturer	Omron Automation and Safety
PackageCylinder, Threaded - M30SeriesE2BSensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Category	Sensors, Transducers
SeriesE2BSensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads		Proximity Sensors
Sensor TypeInductiveSensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VFremination StyleCable Leads	Package	Cylinder, Threaded - M30
Sensing Distance0.591" (15mm)Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Series	E2B
Output TypePNP-NO, 3-WireResponse Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Sensor Type	Inductive
Response Frequency250HzShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Sensing Distance	0.591" (15mm)
ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Output Type	PNP-NO, 3-Wire
Material - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable Leads	Response Frequency	250Hz
Voltage - Supply10 V ~ 30 VTermination StyleCable Leads	Shielding	Shielded
Termination Style Cable Leads	Material - Body	Nickel-Plated Brass
	Voltage - Supply	10 V ~ 30 V
Or anting Tananatana 259C 709C	Termination Style	Cable Leads
$-25^{\circ}\text{C} \sim 70^{\circ}\text{C}$	Operating Temperature	-25°C ~ 70°C
Ingress Protection IP67	Ingress Protection	IP67
Indicator LED	Indicator	LED
Package / Case Cylinder, Threaded - M30	Package / Case	Cylinder, Threaded - M30
Report errors?		Report errors?

E2B-M30LS15-WP-B1 2M Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.







If you have any question about E2B-M30LS15-WP-B1 2M, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com