


E2E-X7D15S DC12-24 2M

E2E-X7D15S DC12-24 2M Information

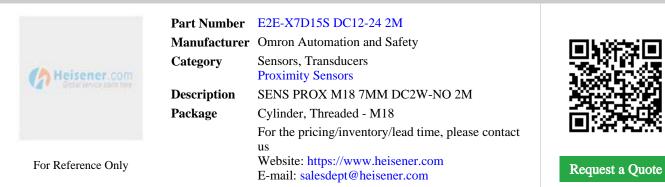

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



E2E-X7D15S DC12-24 2M Specifications

Manufacturer Part Number E2E-X7D15S DC12-24 2M Manufacturer Omron Automation and Safety Category Sensors, Transducers Proximity Sensors Proximity Sensors Package Cylinder, Threaded - M18 Series E2E Sensor Type Inductive Sensing Distance 0.276" (7mm) Output Type NPN-NO, 2-Wire Response Frequency - Shielding Shielded Material - Body Nickel-Plated Brass Voltage - Supply 10 V ~ 30 V Termination Style Cable with Connector Operating Temperature -25°C ~ 70°C Ingress Protection IP67 Indicator LED Package / Case Cylinder, Threaded - M18		
CategorySensors, TransducersProximity SensorsPackageProximity SensorsPackageCylinder, Threaded - M18SeriesE2ESensor TypeInductiveSensor Type0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Manufacturer Part Number	E2E-X7D15S DC12-24 2M
Proximity SensorsPackageCylinder, Threaded - M18SeriesE2ESensor TypeInductiveSensing Distance0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionHEDPackage / CaseCylinder, Threaded - M18	Manufacturer	Omron Automation and Safety
PackageCylinder, Threaded - M18SeriesE2ESensor TypeInductiveSensing Distance0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIEDPackage / CaseCylinder, Threaded - M18	Category	Sensors, Transducers
SeriesE2ESensor TypeInductiveSensing Distance0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIEDPackage / CaseCylinder, Threaded - M18		Proximity Sensors
Sensor TypeInductiveSensing Distance0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating TemperatureP67Ingress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Package	Cylinder, Threaded - M18
Sensing Distance0.276" (7mm)Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-55°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Series	E2E
Output TypeNPN-NO, 2-WireResponse Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Sensor Type	Inductive
Response Frequency-ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Sensing Distance	0.276" (7mm)
ShieldingShieldedMaterial - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Output Type	NPN-NO, 2-Wire
Material - BodyNickel-Plated BrassVoltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Response Frequency	-
Voltage - Supply10 V ~ 30 VTermination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Shielding	Shielded
Termination StyleCable with ConnectorOperating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Material - Body	Nickel-Plated Brass
Operating Temperature-25°C ~ 70°CIngress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Voltage - Supply	10 V ~ 30 V
Ingress ProtectionIP67IndicatorLEDPackage / CaseCylinder, Threaded - M18	Termination Style	Cable with Connector
IndicatorLEDPackage / CaseCylinder, Threaded - M18	Operating Temperature	-25°C ~ 70°C
Package / Case Cylinder, Threaded - M18	Ingress Protection	IP67
	Indicator	LED
Report errors?	Package / Case	Cylinder, Threaded - M18
		Report errors?

E2E-X7D15S DC12-24 2M Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

E2E-X7D15S DC12-24 2M Payment Methods



If you have any question about E2E-X7D15S DC12-24 2M, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com