


## ECQ-E2475JFB

#### **ECQ-E2475JFB Information**

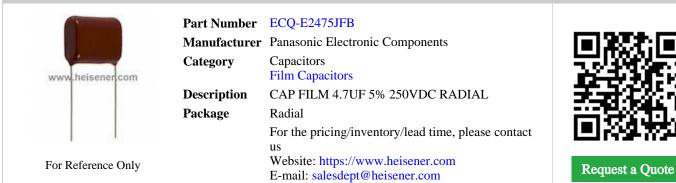

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **ECQ-E2475JFB** Specifications

ManufacturerPanasonic Electronic ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesECQ-E(F)Capacitance4.7µFTolerance±5%Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedDoprating Temperature-Adore A (Table A		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesECQ-E(F)Capacitance4.7µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMouning TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)J.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Manufacturer Part Number	ECQ-E2475JFB
Fin CapacitorsPackageRadialSeriesECQ-E(F)Capacitance4.7µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)0.591" (15.00mm)Applications0.591" (15.00mm)Applications-Features-	Manufacturer	Panasonic Electronic Components
PackageRadialSeriesECQ-E(F)Capacitance4.7μFTolerance±5%Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Category	Capacitors
Series   ECQ-E(F)     Capacitance   4.7µF     Tolerance   ±5%     Voltage Rating - AC   -     Voltage Rating - DC   250V     Dielectric Material   Polyester, Metallized     ESR (Equivalent Series Resistance)   -     Operating Temperature   -40°C ~ 105°C     Mounting Type   Through Hole     Package / Case   Radial     Size / Dinension   1.024" L x 0.472" W (26.00mm x 12.00mm)     Height - Seated (Max)   0.591" (15.00mm)     Lead Spacing   0.591" (15.00mm)     Applications   General Purpose     Features   -		Film Capacitors
Capacitance4.7µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Package	Radial
Tolerance±5%Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Series	ECQ-E(F)
Voltage Rating - AC-Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)Der PinsTerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Capacitance	4.7μF
Voltage Rating - DC250VDielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Tolerance	±5%
Dielectric MaterialPolyester, MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - AC	-
ESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - DC	250V
Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Dielectric Material	Polyester, Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension1.024" L x 0.472" W (26.00mm x 12.00mm)Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Operating Temperature	-40°C ~ 105°C
Size / Dimension 1.024" L x 0.472" W (26.00mm x 12.00mm)   Height - Seated (Max) 1.043" (26.50mm)   Termination PC Pins   Lead Spacing 0.591" (15.00mm)   Applications General Purpose   Features -	Mounting Type	Through Hole
Height - Seated (Max)1.043" (26.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Size / Dimension	1.024" L x 0.472" W (26.00mm x 12.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Height - Seated (Max)	1.043" (26.50mm)
ApplicationsGeneral PurposeFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	General Purpose
Report errors?	Features	-
		Report errors?

#### **ECQ-E2475JFB** Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **ECQ-E2475JFB Payment Methods**



### **ECQ-E2475JFB** Shipping Methods



If you have any question about ECQ-E2475JFB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com