


ECW-FD2W474J

ECW-FD2W474J Information

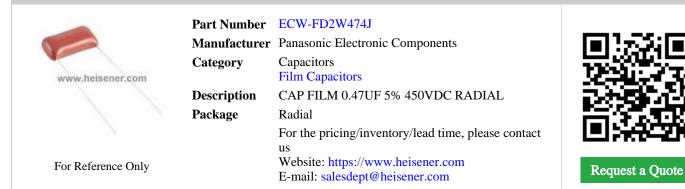

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ECW-FD2W474J Specifications

ManufacturerPanasonic Electronic ComponentsCapacitorsCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesECW-F(D)Capacitance0.47µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolypropylene (PP), MetallizedSeries-Operating Temperature-Adv°C ~ 110°CHrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.228° W (17.50mm x 5.80mm)Height - Seated (Max)0.591" (15.00mm)Applications5.91" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-		
Category Capacitors Film Capacitors Film Capacitors Package Radial Series ECW-F(D) Capacitance 0.47μF Tolerance ±5% Voltage Rating - AC - Voltage Rating - DC 450V Dielectric Material Polypropylene (PP), Metallized Operating Temperature -40°C ~ 110°C Mounting Type Through Hole Size / Dimension 0.689° L x 0.228° W (17.50mm x 5.80mm) Size / Dimension 0.54″ (9.00mm) Height - Seated (Max) 0.591″ (15.00mm) Lead Spacing -051″ (15.00mm) Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT Features -	Manufacturer Part Number	ECW-FD2W474J
Film CapacitorsPackageRadialSeriesECW-F(D)Capacitance0.47μFTolerance±5%Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.228° W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)Applications0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Panasonic Electronic Components
PackageRadialSeriesECW-F(D)Capacitance0.47µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.591" (15.00mm)Applications6.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series ECW-F(D) Capacitance 0.47μF Tolerance ±5% Voltage Rating - AC - Voltage Rating - DC 450V Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -40°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.689" L x 0.228" W (17.50mm x 5.80mm) Height - Seated (Max) 0.354" (9.00mm) Lead Spacing 0.591" (15.00mm) Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.47µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeRadialPackage / CaseRadialSize / Dimension0.589" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.591" (15.00mm)Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	ECW-F(D)
Voltage Rating - AC-Voltage Rating - DC450VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.554" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.47µF
Voltage Rating - DC450VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	-
ESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	450V
Operating Temperature-40°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	$-40^{\circ}C \sim 110^{\circ}C$
Size / Dimension0.689" L x 0.228" W (17.50mm x 5.80mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.228" W (17.50mm x 5.80mm)
Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.354" (9.00mm)
Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT
Report errors'	Features	-
		Report errors?

ECW-FD2W474J Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ECW-FD2W474J Payment Methods



ECW-FD2W474J Shipping Methods



If you have any question about ECW-FD2W474J, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com