


ECW-FE2J224K

ECW-FE2J224K Information

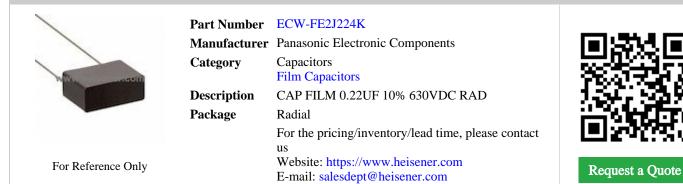

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ECW-FE2J224K Specifications

ManufacturerPanasonic Electronic ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesECWFECapacitance0.22µFTolerance±10%Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Operating Temperature40°C ~ 105°CMounting TypeGasilSize / Dimension0.689° L x 0.276° W (17.50mm x 7.00mm)Height - Seated (Max)0.991° (15.00mm)Applications5.91° (15.00mm)Applications6.91° (15.00mm)Applications6.91° (15.00mm)Features6.91° (15.00mm)		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesECWFECapacitance0.22µFTolerance±10%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolyproylene (PP), MetallizedSeries-Operating Temperature-40°C ~ 105°CMouning TypeThrough HoleSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationCP insLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	ECW-FE2J224K
Film CapacitorsPackageRadialSeriesECWFECapacitance0.22µFTolerance±10%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.276° W (17.50mm x 7.00mm)Height - Seated (Max)0.991" (15.00mm)Applications0.591" (15.00mm)ApplicationsSol 11" (15.00mm)Features-	Manufacturer	Panasonic Electronic Components
PackageRadialPackageRadialSeriesECWFECapacitance0.22µFTolerance±10%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Berries ECWFE Capacitance 0.22µF Tolerance ±10% Voltage Rating - AC - Voltage Rating - DC 630V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature - Mounting Type - Package / Case Radial Size / Dimension 0.689" L x 0.276" W (17.50mm x 7.00mm) Height - Seated (Max) 0.490" (12.50mm) Termination PC Pins Lead Spacing 0.591" (15.00mm) Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.22µFCoperating - AC±10%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.490° (12.50mm x 7.00mm)Height - Seated (Max)OP FinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±10%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	ECWFE
Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.22µF
Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)Termination0.591" (15.00mm)Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 10\%$
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	-
ESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	630V
Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-40°C ~ 105°C
Size / Dimension0.689" L x 0.276" W (17.50mm x 7.00mm)Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.490" (12.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.276" W (17.50mm x 7.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.490" (12.50mm)
Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

ECW-FE2J224K Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ECW-FE2J224K Payment Methods



ECW-FE2J224K Shipping Methods



If you have any question about ECW-FE2J224K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com