


# ECW-FE2J334J

## **ECW-FE2J334J Information**

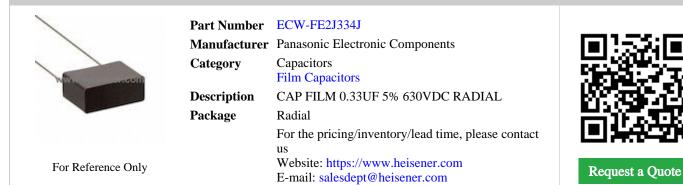

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **ECW-FE2J334J Specifications**

ManufacturerPanasonic Electronic ComponentsCapacitorsCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesECWFECapacitance0.33 µFTolerance±5%Voltage Rating - DC630 VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Operating Temperature-00°C ~ 105°CVoltage / CaseRadialSize / Dimension0.689° L x 0.335° W (17.50mm x 8.50mm)Height - Seated (Max)0.571° (14.50mm)PerminationPC PinsLead Spacing0.591° (15.00mm)Applications.591° (15.00mm)Features-Features-Features-Features-Capacitons-Statures- <tr< th=""><th></th><th></th></tr<>		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesECWFECapacitance0.33µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedDoperating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)PerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	ECW-FE2J334J
Film CapacitorsPackageRadialSeriesECWFECapacitance0.33µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)PC Pins0.591" (15.00mm)Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Panasonic Electronic Components
PackageRadialSeriesECWFECapacitance0.33µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Berries   ECWFE     Capacitance   0.33µF     Tolerance   ±5%     Voltage Rating - AC   -     Voltage Rating - DC   630V     Dielectric Material   Polypropylene (PP), Metallized     ESR (Equivalent Series Resistance)   -     Operating Temperature   -40°C ~ 105°C     Mounting Type   Through Hole     Package / Case   Radial     Size / Dimension   0.689" L x 0.335" W (17.50mm x 8.50mm)     Height - Seated (Max)   0.571" (14.50mm)     Pachagaring   0.591" (15.00mm)     Applications   EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT     Features   -		Film Capacitors
Capacitance0.33µFTolerance±5%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)PerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	ECWFE
Voltage Rating - AC-Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.33µF
Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	±5%
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	-
ESR (Equivalent Series Resistance)-Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	630V
Operating Temperature-40°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Notified TypeThrough HoleMounting TypeRadialPackage / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-40°C ~ 105°C
Size / Dimension0.689" L x 0.335" W (17.50mm x 8.50mm)Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.571" (14.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.335" W (17.50mm x 8.50mm)
Lead Spacing0.591" (15.00mm)ApplicationsEMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.571" (14.50mm)
Applications EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT   Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	EMI, RFI Suppression; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

#### **ECW-FE2J334J** Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **ECW-FE2J334J Payment Methods**



# **ECW-FE2J334J Shipping Methods**



If you have any question about ECW-FE2J334J, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com