


# **EET-ED2W101CA**

#### **EET-ED2W101CA Information**



E-mail: salesdept@heisener.com

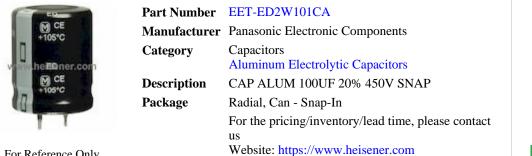

**Request a Quote** 

For Reference Only

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **EET-ED2W101CA Specifications**

ManufacturerPanasonic Electronic ComponentsCategoryCapacitorsPackageAluminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesTS-EDCapacitance100µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.0mm)Size / Dimension1.81" (30.0mm)Kirface Mount Land Size1.81" (30.0mm)		
CategoryCapacitorsPackageRadial, Can - Snap-InPackageRadial, Can - Snap-InSeriesTS-EDCapacitance100µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.0mm)Size / Dimension1.81" (30.0mm)Kirghe Kuast1.81" (30.0mm)	Manufacturer Part Number	EET-ED2W101CA
Auminum Electrolytic CapacitorsPackageRadial, Can - Snap-InSeriesTS-EDCapacitance100µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Manufacturer	•
PackageRadial, Can - Snap-InSeriesTS-EDCapacitance100µFTolerance±20%Voltage - Rated450VSSR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension1.81" (30.00mm)Kirght - Seated (Max)1.81" (30.00mm)Surface Mount Land Size-	Category	Capacitors
SeriesTS-EDCapacitance100µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.994" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Hight - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-Surface Mount Land Size-		Aluminum Electrolytic Capacitors
Capacitance100µFTolerance±20%Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - High Frequency910mA @ 120HzImpedance.Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size.	Package	Radial, Can - Snap-In
Provide Pr	Series	TS-ED
Voltage - Rated450VESR (Equivalent Series Resistance)1.326 Ohm @ 120HzLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Capacitance	100µF
For ESR (Equivalent Series Resistance)1.326 Ohm @ 120HzESR (Equivalent Series Resistance)3000 Hrs @ 105°CLifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Tolerance	$\pm 20\%$
Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)	Voltage - Rated	450V
Operating Temperature-25°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)	ESR (Equivalent Series Resistance)	1.326 Ohm @ 120Hz
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Lifetime @ Temp.	3000 Hrs @ 105°C
ApplicationsGeneral PurposeRipple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Operating Temperature	-25°C ~ 105°C
Ripple Current - Low Frequency910mA @ 120HzRipple Current - High Frequency1.3A @ 100kHzImpedance-Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Polarization	Polar
In a constraint of the second secon	Applications	General Purpose
Impedance     -       Lead Spacing     0.394" (10.00mm)       Size / Dimension     0.984" Dia (25.00mm)       Height - Seated (Max)     1.181" (30.00mm)       Surface Mount Land Size     -	Ripple Current - Low Frequency	910mA @ 120Hz
Lead Spacing0.394" (10.00mm)Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Ripple Current - High Frequency	1.3A @ 100kHz
Size / Dimension0.984" Dia (25.00mm)Height - Seated (Max)1.181" (30.00mm)Surface Mount Land Size-	Impedance	-
Height - Seated (Max) 1.181" (30.00mm)   Surface Mount Land Size -	Lead Spacing	0.394" (10.00mm)
Surface Mount Land Size -	Size / Dimension	0.984" Dia (25.00mm)
	Height - Seated (Max)	1.181" (30.00mm)
Mounting Type	Surface Mount Land Size	-
Mounting Type Infough Hole	Mounting Type	Through Hole
Package / Case Radial, Can - Snap-In	Package / Case	Radial, Can - Snap-In
Report errors?		Report errors?

#### **EET-ED2W101CA Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# **EET-ED2W101CA Payment Methods**



## **EET-ED2W101CA Shipping Methods**



If you have any question about EET-ED2W101CA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com