


EMMA240063-P5RP-IC

EMMA240063-P5RP-IC Information

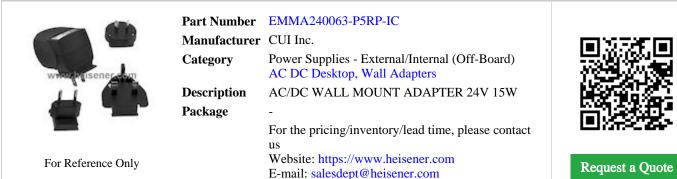

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



EMMA240063-P5RP-IC Specifications

| Manufacturer Part NumberEMMA240063-PSRP-ICManufacturerCUI Inc.CategoryPower Supplies - External/Internal (Off-Board) AC DC Desktop, Wall AdaptersPackage-PackageInternationalSeriesEMMA 15WRegion UtilizedInternationalFormWall MountInput TypeMulti-Blade (Included)Voltage - Input90 ~ 264 VACVoltage - Output (Max)625mAPower (Watts)15WNo Load Power Consumption900mW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOutput ConnectorBarel Plug RA, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSiz / Dimension3.17" Lx 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | | |
|---|---------------------------|--|
| Category Power Supplies - External/Internal (Off-Board) AC DC Desktop, Wall Adapters AC DC Desktop, Wall Adapters Package - Series EMMA 15W Region Utilized International Form Wall Mount Input Type Multi-Blade (Included) Voltage - Input 90 ~ 264 VAC Voltage - Output (Max) 625mA Power (Watts) 15W No Load Power Consumption 300mW (Max) Polarization Positive Center Applicationss Kedical Efficiency Level V Operating Temperature 0°C ~ 50°C Output Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm | Manufacturer Part Number | EMMA240063-P5RP-IC |
| AC DC Desktop, Wall AdaptersPackage-SeriesEMMA 15WRegion UtilizedInternationalFormWall MountInput TypeMulti-Blade (Included)Voltage - Input90 ~ 264 VACVoltage - Output24VCurrent - Output (Max)625mAPower (Watts)15WNo Load Power Consumption90omW (Max)PolarizationMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm 1.D, x 5.5mm O.D, x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Manufacturer | CUI Inc. |
| Package-SeriesEMMA 15WRegion UtilizedInternationalFormWall MountInput TypeMulti-Blade (Included)Voltage - Input90 ~ 264 VACVoltage - Output24VCurrent - Output (Max)625mAPower (Wats)15WNo Load Power Consumption300mW (Max)PolarizationPositive CenterApplicationsKedicalEfficiency0° ~ 50°COutput ConnectorBartel Plug R/A, 2.1mm 1.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Category | Power Supplies - External/Internal (Off-Board) |
| Series EMMA 15W Region Utilized International Form Wall Mount Input Type Multi-Blade (Included) Voltage - Input 90 ~ 264 VAC Voltage - Output 24V Current - Output (Max) 625mA Power (Watts) 15W No Load Power Consumption 300mW (Max) Polarization Positive Center Applications Medical Efficiency Level V Operating Temperature 0°C ~ 50°C Output Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | | AC DC Desktop, Wall Adapters |
| Region UtilizedInternationalFormWall MountInput TypeMulti-Blade (Included)Voltage - Input90 ~ 264 VACVoltage - Output24VCurrent - Output (Max)625mAPower (Watts)15WNo Load Power Consumption90omW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBartel Plug R/A, 2.1mm I.D. x. 5.5mm O.D. x. 9.5mmSize / Dimension3.1" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Package | - |
| Form Wall Mount Input Type Multi-Blade (Included) Voltage - Input 90 ~ 264 VAC Voltage - Output 24V Current - Output (Max) 625mA Power (Watts) 15W No Load Power Consumption 300mW (Max) Polarization Positive Center Applications Medical Efficiency Level V Operating Temperature 0°C ~ 50°C Output Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dinension 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Series | EMMA 15W |
| Input TypeMulti-Blade (Included)Voltage - Input90 ~ 264 VACVoltage - Output24VCurrent - Output (Max)625mAPower (Watts)15WNo Load Power Consumption300mW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Region Utilized | International |
| Voltage - Input 90 ~ 264 VAC Voltage - Output 24V Current - Output (Max) 625mA Power (Watts) 15W No Load Power Consumption 300mW (Max) Polarization Positive Center Applications Medical Efficiency Level V Operating Temperature 0°C ~ 50°C Sutt Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.1" "L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Form | Wall Mount |
| Voltage - Output24VCurrent - Output (Max)625mAPower (Watts)15WNo Load Power Consumption300mW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Input Type | Multi-Blade (Included) |
| Current - Output (Max)625mAPower (Watts)15WNo Load Power Consumption300mW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Voltage - Input | 90 ~ 264 VAC |
| Power (Watts)15WNo Load Power Consumption300mW (Max)PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Voltage - Output | 24V |
| No Load Power Consumption 300mW (Max) Polarization Positive Center Applications Medical Efficiency Level V Operating Temperature 0°C ~ 50°C Output Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Current - Output (Max) | 625mA |
| PolarizationPositive CenterApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Power (Watts) | 15W |
| ApplicationsMedicalApplicationsMedicalEfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | No Load Power Consumption | 300mW (Max) |
| EfficiencyLevel VOperating Temperature0°C ~ 50°COutput ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Polarization | Positive Center |
| Operating Temperature 0°C ~ 50°C Output Connector Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Applications | Medical |
| Output ConnectorBarrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Efficiency | Level V |
| Size / Dimension 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) | Operating Temperature | $0^{\circ}C \sim 50^{\circ}C$ |
| | Output Connector | Barrel Plug R/A, 2.1mm I.D. x 5.5mm O.D. x 9.5mm |
| Report errors? | Size / Dimension | 3.17" L x 1.89" W x 1.71" H (80.6mm x 47.9mm x 43.3mm) |
| | | Report errors? |

EMMA240063-P5RP-IC Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

EMMA240063-P5RP-IC Payment Methods



EMMA240063-P5RP-IC Shipping Methods



If you have any question about EMMA240063-P5RP-IC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com