

## ESD-124-G-26

est a Quote

## ESD-124-G-26 Information

| Heisener.com       | Part Number  | ESD-124-G-26   |
|--------------------|--------------|--|
|                    | Manufacturer | Samtec Inc.  |
|                    | Category     | Connectors, Interconnects<br>Rectangular Connectors - Headers, Receptacles,<br>Female Sockets  |
|                    | Description  | ELEVATED SOCKET STRIPS   |
|                    | Package      | -  |
| For Reference Only |              | For the pricing/inventory/lead time, please contact<br>us<br>Website: https://www.heisener.com |
|                    |              | E-mail: salesdept@heisener.com   |

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **ESD-124-G-26 Specifications**

| Manufacturer Part Number          | ESD-124-G-26  |  |
|-----------------------------------|---|--|
| Manufacturer                      | Samtec Inc.   |  |
| Category                          | Connectors, Interconnects                                     |  |
|                                   | Rectangular Connectors - Headers, Receptacles, Female Sockets |  |
| Package                           | -   |  |
| Series                            | ESD   |  |
| Connector Type                    | Elevated Socket   |  |
| Contact Type                      | Female Socket   |  |
| Style                             | Board to Board  |  |
| Number of Positions               | 48  |  |
| Number of Positions Loaded        | All   |  |
| Pitch - Mating                    | 0.100" (2.54mm)   |  |
| Number of Rows                    | 2   |  |
| Row Spacing - Mating              | 0.100" (2.54mm)   |  |
| Mounting Type                     | Through Hole  |  |
| Termination                       | Solder  |  |
| Fastening Type                    | Push-Pull   |  |
| Contact Finish - Mating           | Gold  |  |
| Contact Finish Thickness - Mating | 10μin (0.25μm)  |  |
| Insulation Color                  | Black   |  |
| Insulation Height                 | 0.300" (7.62mm)   |  |
| Contact Length - Post             | 0.215" (5.46mm)   |  |
| Operating Temperature             | -55°C ~ 125°C   |  |
| Material Flammability Rating      | UL94 V-0  |  |

| Contact Finish - Post  | Gold |                |
|------------------------|------|----------------|
| Mated Stacking Heights | -    |                |
| Ingress Protection     | -    |                |
| Features               | -    |                |
|                        |      | Report errors? |

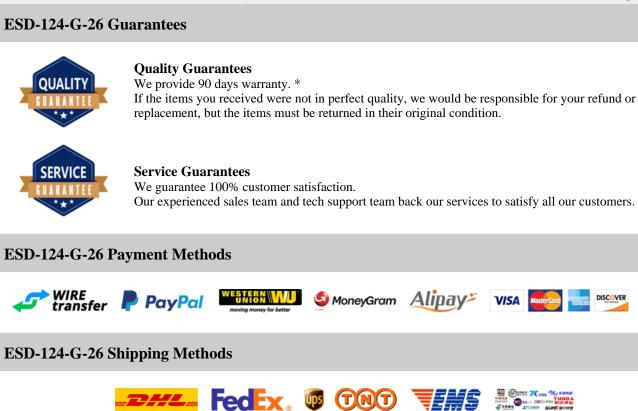

DISCOVER

If you have any question about ESD-124-G-26, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com