

ESQ-105-38-L-D

ESQ-105-38-L-D Information

Heisener.com	Part Number Manufacturer Category Description	ESQ-105-38-L-D Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED SOCKET STRIPS	
	Package	- For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQ-105-38-L-D Specifications

ManufacturerSance Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions10Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)FreminationSolderFortage MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingInjun (0.5µm)Fastening TypeBackInsulation ColorBlackInsulation Finish - Mating0.02µm)Station Finish - Mating0.02µm)Contact Finish - Mating0.02µm)Station Finish - Mating0.02µm)Station Finish - Mating0.02µm)Station ColorBlackStation Finish - Mating0.02µm)Station Finish - Mating0.02µm) <th>Manufastan Dart Northan</th> <th>ESO 105 29 L D</th>	Manufastan Dart Northan	ESO 105 29 L D
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions10Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of	Manufacturer Part Number	ESQ-105-38-L-D
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of PositionsI0Number of Positions CadedAllNumber of Rows2Rows Spacing - MathyI.00° (2.54mm)Number of Rows0.10° (2.54mm)<		
Package-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions0Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Young Type0.100° (2.54mm)ForminationSolderTornig HoleSolderYoung TypeOsdoGotad Teinish - MatingGoldContact Finish - MatingGoldContact Finish - MatingInjuin (0.52µm)Insulation ColorBlackInsulation Height0.435° (11.05mm)Contact Length - Post0.200° (7.37mm)	Category	Connectors, Interconnects
SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions10Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeOlderFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions10Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.90" (0.55µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions10Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOlong (2.54mm)FartminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (1.05mm)Contact Length - Post0.290" (7.37mm)	Series	ESQ
StyleBoard to BoardNumber of Positions10Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Connector Type	Elevated Socket
Number of Positions10Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.200" (7.37mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypeSolderContact Finish - MatingPush-PullContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Positions	10
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Contact Finish - Mating	Gold
Insulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.290" (7.37mm)	Insulation Color	Black
-	Insulation Height	0.435" (11.05mm)
	Contact Length - Post	0.290" (7.37mm)
Operating Temperature $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQ-105-38-L-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQ-105-38-L-D Payment Methods

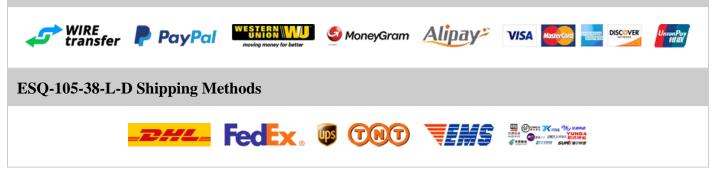

If you have any question about ESQ-105-38-L-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com