

# ESQ-113-13-L-D-LL

## ESQ-113-13-L-D-LL Information

Heisener.Com Distal service state time	Part Number	ESQ-113-13-L-D-LL	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED SOCKET STRIPS	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## ESQ-113-13-L-D-LL Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFreminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingIopin (0.25µm)Station ColorBlackInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketConnector TypeForkedContact TypeBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOddGoldContact Finish - MatingOrotact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.435° (11.05mm)Contact Length - Post0.290° (7.37mm)	Manufacturer Part Number	ESQ-113-13-L-D-LL
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeDi Ong HoleTerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingIloin (0.25µm)Insulation ColorBlackInsulation Height0.435° (1.105mm)Contact Length - Post0.200° (7.37mm)	Manufacturer	Samtec Inc.
Package-SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingIquin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Category	Connectors, Interconnects
SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingIpuin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening Type9ush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOuldContact Finish - MatingGoldContact Finish - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Series	ESQ
StyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Connector Type	Elevated Socket
Number of Positions 26   Number of Positions Loaded All   Pitch - Mating 0.100" (2.54mm)   Number of Rows 2   Row Spacing - Mating 0.100" (2.54mm)   Mounting Type 0.100" (2.54mm)   Termination Kinked Pin, Solder   Fastening Type Vunber Of Positions   Contact Finish - Mating Gold   Contact Finish Thickness - Mating Ipin (0.25µm)   Insulation Color Black   Insulation Height 0.435" (11.05mm)   Contact Length - Post 0.290" (7.37mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Positions	26
Number of Rows2Number of Rows0.100" (2.54mm)Row Spacing - MatingThrough HoleMounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Number of Rows	2
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Termination	Kinked Pin, Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Contact Finish - Mating	Gold
Insulation Height0.435" (11.05mm)Contact Length - Post0.290" (7.37mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.290" (7.37mm)	Insulation Color	Black
	Insulation Height	0.435" (11.05mm)
Operating Temperature $-55^{\circ}$ C $\sim 125^{\circ}$ C	Contact Length - Post	0.290" (7.37mm)
operating reinperature 55 C 125 C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

#### ESQ-113-13-L-D-LL Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### ESQ-113-13-L-D-LL Payment Methods

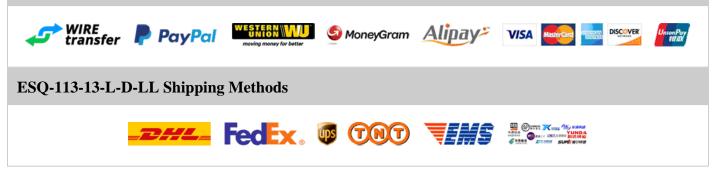

If you have any question about ESQ-113-13-L-D-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com