

ESQ-135-37-S-D-LL

ESQ-135-37-S-D-LL Information

	Part Number	ESQ-135-37-S-D-LL	
Heisener.com	Manufacturer		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED SOCKET STRIPS	
	Package	-	回梁之兆
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQ-135-37-S-D-LL Specifications

Manufacturer Part NumberESQ-155-57-S-D-LLManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesESQConnector TypeElevated SocketConnector TypeForkedConnector TypeBoard to BoardStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypePinche Pin, SolderFastening TypeOush Pin, SolderContact Finish - MatingGoldContact Finish - Mating30µin (0.76µm)Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.090" (2.29mm)		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series ESQ Connector Type Elevated Socket Contact Type Forked Syle Board to Board Number of Positions 70 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type Through Hole Termination Kinked Pin, Solder Fastening Type Quin (0.76µm) Contact Finish - Mating Gold Contact Finish Thickness - Mating Main (0.76µm) Insulation Color Black Insulation Height 0.435" (1.05mm)	Manufacturer Part Number	ESQ-135-37-S-D-LL
Ackage-SeriesESQConnector TypeElevated SocketConnector TypeForkedStyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPich - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating10100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingGoldStatening TypeBush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.435" (11.05mm)	Manufacturer	
Package-SeriesESQConector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFarening TypeOnde HoleFastening TypeOush PullContact Finish - MatingGoldContact Finish - MatingOujon (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Category	Connectors, Interconnects
SeriesESQConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFartminationKinked Pin, SolderFastening TypeOutContact Finish - MatingGoldContact Finish Thickness - Mating3/µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOglContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOuldContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Series	ESQ
StyleBoard to BoardNumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.435" (11.05mm)	Connector Type	Elevated Socket
Yumber of Positions70Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOub Push-PullContact Finish - MatingGoldContact Finish Thickness - MatingJourin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Number of Positions	70
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Number of Rows	2
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Termination	Kinked Pin, Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.435" (11.05mm)	Contact Finish - Mating	Gold
Insulation Height 0.435" (11.05mm)	Contact Finish Thickness - Mating	30µin (0.76µm)
	Insulation Color	Black
Contact Length - Post 0.090" (2.29mm)	Insulation Height	0.435" (11.05mm)
	Contact Length - Post	0.090" (2.29mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQ-135-37-S-D-LL Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQ-135-37-S-D-LL Payment Methods

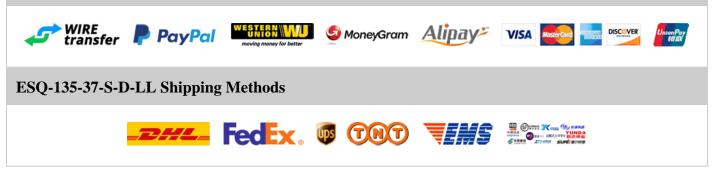

If you have any question about ESQ-135-37-S-D-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com