

ESQT-103-02-M-D-790

ESQT-103-02-M-D-790 Information

Heisener.com	Part Number Manufacturer Category Description Package	ESQT-103-02-M-D-790 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
For Reference Only	-	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-103-02-M-D-790 Specifications

Manufacturer Part NumberESQT-103-02-M-D-790ManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesFleXYZ? ESQTContact TypeBoard to Board or CableContact TypeBoard to Board or CableNumber of Positions6Number of Positions LoadedN1Pick - Mating0.079° (2.00mm)Number of Rows2Row Spacing - MatingSolderTrinationSolderFastening TypeSolderContact Finish - MatingGoldStrieling TypeGoldStrieling TypeGoldStrieling TypeSolderFastening TypeGoldContact Finish - MatingGoldStrieling TypeSolderFastening TypeBackContact Finish Thickness - MatingGoldStrieling TypeBackInsulation ColorBlackStrieling TypeSolderStrieling TypeSolderContact Finish Thickness - MatingSolderStrieling TypeSolderStrieling TypeSolderStrieli		
CategoryConnectors. InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSordetStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeThrough HoleFreminationSolderContact Finish - MatingOidContact Finish - MatingOidu (0.51µm)Insulation ColorBlackInsulation FlexesJouin (0.51µm)Insulation FlexesJouin (0.51µm)Contact Finish Thickness - MatingOidu (0.51µm)Insulation FlexesSolderInsulation FlexesJouin (0.51µm)Insulation FlexesSolderInsulation FlexesSolder <trr< td=""><td>Manufacturer Part Number</td><td>ESQT-103-02-M-D-790</td></trr<>	Manufacturer Part Number	ESQT-103-02-M-D-790
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingOjun (0.51µm)Contact Finish Thickness - Mating0,079" (2.00mm)Contact Finish Thickness - MatingOjun (0.51µm)Insulation ColorBlackInsulation Height0,79" (2.00mm)Contact Length - Post0.000" (1.52mm)SolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolderSolder<	Manufacturer	Samtec Inc.
Package-SeriesFlcXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeDioderTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldContact Finish Thickness - MatingOjor (0.01µm)Insulation ColorBlackInsulation Height0.790" (2.00mm)Contact Length - Post0.060" (1.52mm)Contact Funsh ThicknessSiderStation TypeSiderStation TypeSiderContact Finish Thickness - MatingSiderStation ColorBlackInsulation Height0.790" (2.07mm)Contact Funsh Thickness - MatingSider (1.52mm)Contact Finish Thickness - MatingSider (1.52mm)Contact Funsh ThicknessSider (1.52mm)Contact Funsh ThicknessSider (1.52mm)Contact Funsh ThicknessSider (1.52mm)Contact Funsh ThicknessSider (1.52mm)Contact Funsh The MatingSider (1.52mm)Contact Funsh The MatingSider (1.52mm)Contact Funsh The Mating <t< td=""><td>Category</td><td>Connectors, Interconnects</td></t<>	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldSoltar Einish Thickness - MatingBiakInsulation ColorBiackInsulation Height0.79" (2.07mm)Contact Fungt-PostSider(1.52mm)Insulation Height0.60" (1.52mm)Contact Fungt-Post55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingOujni (0.51µm)Insulation ColorBlackInsulation Height0.79" (2.00mm)Contact Length - Post0.060" (1.52mm)Contact Finish Post0.50°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.01Insulation ColorBlackInsulation Height0.790" (2.00mm)Contact Length - Post0.060" (1.52mm)Contact Finish Thote55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.600" (1.52mm)Operating Temperature-55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 6 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.790" (20.07mm) Contact Length - Post 0.060" (1.52mm) Operating Temperature -55°C ~ 125°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJouri (0.51µm)Insulation ColorBlackInsulation Height0.790" (2.00mm)Contact Length - Post0.600" (1.52mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Yermination 0.079" (2.00mm) Termination 0.079" (2.00mm) Fastening Type Solder Forstening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.790" (20.07mm) Contact Length - Post 0.060" (1.52mm) Operating Temperature 55°C ~ 125°C	Number of Positions	6
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.51µm)Insulation ColorBlackInsulation Height0.79" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.600" (1.52mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.790" (20.07mm)Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.790" (20.07mm) Contact Length - Post 0.060" (1.52mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	20µin (0.51µm)
Contact Length - Post0.060" (1.52mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.790" (20.07mm)
	Contact Length - Post	0.060" (1.52mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?






Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

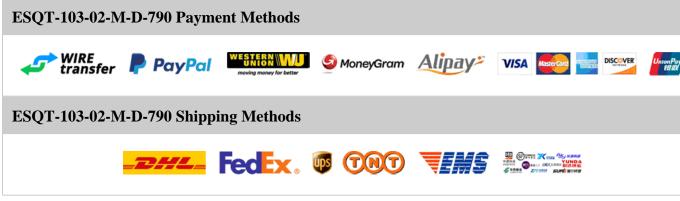

If you have any question about ESQT-103-02-M-D-790, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com