

ESQT-104-02-F-S-330

ESQT-104-02-F-S-330 Information

Heisener.com	Part Number Manufacturer Category	ESQT-104-02-F-S-330 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	5.77 June 1
	Package	-	回認設新聞
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-104-02-F-S-330 Specifications

ManufacturerSantec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllNumber of Rows1Number of Rows0.079° (2.00mm)Number of Rows1ForninationSolderYoung TypeSolderForninationGoldContact Finish - MatingGoldContact Finish Finkenses - MatingGiolInsulation ColorBlackInsulation Height0.30° (8.38mn)Contact Length - Post0.520° (13.21mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllNumber of Rows1Number of Rows1Row Spacing - Mating-Number of RowsSolderForninationSolderForninationSolderForter IniniationSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mn)Contact Length - Post0.520" (13.21mm)	Manufacturer Part Number	ESQT-104-02-F-S-330
Icctangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFlcXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Nourting TypeSolderPrimitationSolderForminationGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.30" (8.38mm)Contact Length - Post0.520" (13.21mm)	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.300" (8.38mm)Contact Length - Post0.520" (13.21mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Connector Type	Elevated Socket
Number of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting Type-Mounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingBiackInsulation Color0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Number of Positions	4
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating 3μ in (0.08µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Termination	Solder
Contact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Contact Finish - Mating	Gold
Insulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Contact Finish Thickness - Mating	3µin (0.08µm)
Contact Length - Post 0.520" (13.21mm)	Insulation Color	Black
-	Insulation Height	0.330" (8.38mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.520" (13.21mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?






Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

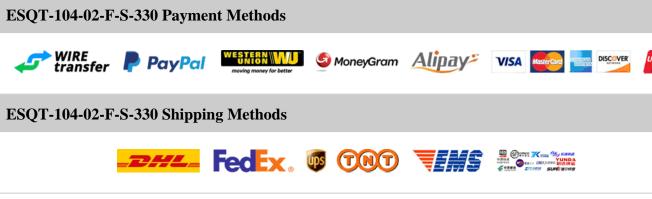

If you have any question about ESQT-104-02-F-S-330, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com