

ESQT-104-02-G-S-365

ESQT-104-02-G-S-365 Information

Heisener.com	Part Number	ESQT-104-02-G-S-365	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	
	Package	-	- 国際授業的
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-104-02-G-S-365 Specifications

Manufacturer Part NumberESQT-104-02-G-S-365ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeBoard or CableNumber of Positions4Number of Positions LoadedAllNumber of Rossi1Number of Rossi1Number of RossiSolderTerminationSolderStatening TypePush-PullContact Finish Thickness - MatingGoldContact Length - PostBlackInsulation ColorBlackContact Length - PostSolderContact Length - PostSolderInsulation King MatingOjain (0.51µm)Contact Finish Thickness - MatingOjais (0.51µm)Contact Length - PostU.94 V-0Material Flammability RatingUL94 V-0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSord or CableNumber of Positions4Number of Positions LoadedAllNumber of Positions Loaded1Number of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderNumber of RowsSolderNumber of Rows0.019" (2.00mm)Number of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderSolder SolderSolderSolder Solder <td>Manufacturer Part Number</td> <td>ESQT-104-02-G-S-365</td>	Manufacturer Part Number	ESQT-104-02-G-S-365
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.51µm)Contact Finish - MatingOutInsulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFicXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeodderFreminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingOddInsulation ColorBlackInsulation Finish - MatingJosf" (2.27mm)Contact Finish Thickness - MatingJosf" (2.27mm)Contact Finish Thickness - MatingJosf" (2.27mm)Contact Finish Thickness - MatingSols" (2.27mm)Contact Finish Thickness - MatingJosf" (2.27mm)Contact Finish Thickness - MatingSols" (2.27mm)Contact Finish ThicknessSols" (2.25°C)	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSolderFarminationSolderFortact Finish - MatingOidContact Finish - MatingGoldContact Finish - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOudContact Finish - Mating0.019" (0.01µm)Insulation ColorBlackInsulation Height0.365" (0.21µm)Contact Length - Post0.485" (12.32µm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.01Solder1Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
Style Board to Board or Cable Number of Positions 4 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.365" (9.27mm) Otact Length - Post 0.485" (12.32mm) Operating Temperature -59°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 4 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.365" (9.27mm) Contact Length - Post 0.485" (12.32mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting Type-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorJ.655" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Number of Positions	4
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.365" (9.27mm)Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.365" (9.27mm) Contact Length - Post 0.485" (12.32mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	20µin (0.51µm)
Contact Length - Post0.485" (12.32mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.365" (9.27mm)
	Contact Length - Post	0.485" (12.32mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-104-02-G-S-365 Payment Methods

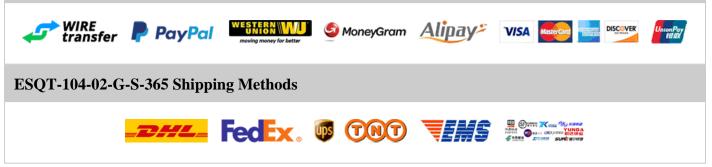

If you have any question about ESQT-104-02-G-S-365, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com