

ESQT-105-02-G-D-452

ESQT-105-02-G-D-452 Information

Heisener.com	Part Number Manufacturer Category Description	ESQT-105-02-G-D-452 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-105-02-G-D-452 Specifications

ManufacturerSantec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mn)Number of Rows0.079° (2.00mn)Number of RowsSolderFerninationSolderFortage TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation FlexiptSolareStation FlexiptSolareContact Finish Thickness - Mating0.011148mn)Insulation FlexiptSolareStation Flex	Manufacturer Part Number	ESQT-105-02-G-D-452	
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of RowsSolderForninationSolderForninationSolderForninationSolderContact Finish - MatingGoldContact Finish Thickness - MatingGuli (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (0.11mm)			
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFicXY2 RSQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of PositionsIoNumber of Positions LoadedAllNumber of Rows2Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.00mm)Num			
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions0Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingNorghe HoleMounting TypeSolderFarminationSolderFortact Finish - MatingOidContact Finish - MatingGoldContact Finish - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.452" (1.148mm)Contact Length - Post0.398" (0.11mm)	Category	Connectors, Interconnects	
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeOlderFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingOlderInsulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingJourn (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Package	-	
Contact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeOn79" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (0.11mm)	Series	FleXYZ? ESQT	
StyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Connector Type	Elevated Socket	
Number of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Contact Type	Forked	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Style	Board to Board or Cable	
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type9ks-PullContact Finish - MatingOddGoldact Finish - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Number of Positions	10	
Number of Rows2Number of Rows0.079" (2.00mm)Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Number of Positions Loaded	All	
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Row Spacing - Mating	0.079" (2.00mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Termination	Solder	
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Contact Finish - Mating	Gold	
Insulation Height0.452" (11.48mm)Contact Length - Post0.398" (10.11mm)	Contact Finish Thickness - Mating	20µin (0.51µm)	
Contact Length - Post 0.398" (10.11mm)	Insulation Color	Black	
-	Insulation Height	0.452" (11.48mm)	
Operating Temperature -55°C ~ 125°C	Contact Length - Post	0.398" (10.11mm)	
	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?






Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

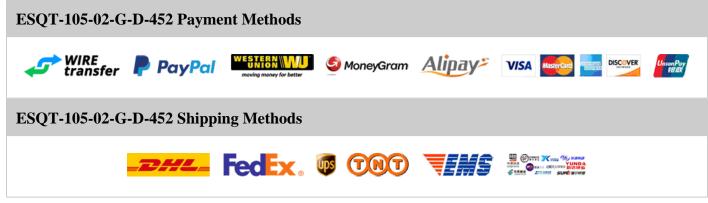

If you have any question about ESQT-105-02-G-D-452, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com