

# ESQT-105-02-L-D-453

### ESQT-105-02-L-D-453 Information

	Part Number	ESQT-105-02-L-D-453	
Heisener.com		-	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects	
		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	
	Package	-	- 回診提齢的
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### ESQT-105-02-L-D-453 Specifications

Manufacturer Part NumberESQT-105-02-L-D-453ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions0Number of Positions LoadedAllPich - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.019° (2.00mm)Munting TypeSolderForniationSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldState Finish - MatingSolderState Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJupín (0.25µm)Insulation ColorBlackInsulation Flexipt0.397° (10.08mm)Contact Length - Post0.397° (10.08mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeElevated SocketConnector TypeSord to Board or CableNumber of Positions0Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingNorg" (2.00mm)Mouting TypeNorg" (2.00mm)FreminationSolderFreminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Finish - Mating0.453" (11.50mm)Contact Finish Thickness - Mating0.397" (10.08mm)	Manufacturer Part Number	ESQT-105-02-L-D-453
Icctangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFlcXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Positions0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.019" (2.00mm)Number of Rows0.010Number o	Manufacturer	Samtec Inc.
Package.SeriesFleXY2? ESQTConector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBlackInsulation ColorBlackInsulation Height0.397" (10.08mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.39"" (0.08mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIloµin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)FartminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Connector Type	Elevated Socket
Number of Positions10Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/ujni (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Number of Positions	10
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI0µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.453" (11.50mm)Contact Length - Post0.397" (10.08mm)	Contact Finish - Mating	Gold
Insulation Height 0.453" (11.50mm)   Contact Length - Post 0.397" (10.08mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.397" (10.08mm)	Insulation Color	Black
· · · · · · · · · · · · · · · · · · ·	Insulation Height	0.453" (11.50mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.397" (10.08mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## ESQT-105-02-L-D-453 Payment Methods

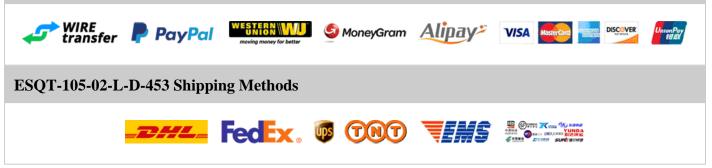

If you have any question about ESQT-105-02-L-D-453, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com