

ESQT-108-02-L-D-742

ESQT-108-02-L-D-742 Information

Heisener.com	Part Number Manufacturer Category Description	ESQT-108-02-L-D-742 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
	Package	-	间浸渍器
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-108-02-L-D-742 Specifications

ManufacturerSamee Inc.CategoryConnectors, InterconnectsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStriesSord to Board or CableNumber of Positions6Number of Positions Loaded16Number of Rows2Number of Rows0.079° (2.00mn)Number of Rows0.019°		
CategoryConnectorsCategoryRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSolderForminationSolderFastening TypeOsdContact Finish - MatingOidContact Finish Thickness - MatingOjun (0.25µm)	Manufacturer Part Number	ESQT-108-02-L-D-742
Hectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingNorgen (2.00mm)Mounting TypeSolderFastening TypeSolderFastening TypeGoldContact Finish - MatingGuldMounting TypeSolderFastening TypeJune (2.00mm)Fastening TypeJun	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeOutper DestingContact Finish - MatingGoldContact Finish - MatingJujin (0.25µm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingIpin (0.25µm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - Mating10µin (0.25µm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - Mating0.01Mount Finish - Mating10µin (0.25µm)	Connector Type	Elevated Socket
Number of Positions16Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYour Contact Finish Thickness - Mating10µin (0.25µm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions	16
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Termination	Solder
Contact Finish Thickness - Mating 10µin (0.25µm)	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
Insulation Color Black	Contact Finish Thickness - Mating	10μin (0.25μm)
Institution Color Diack	Insulation Color	Black
Insulation Height 0.742" (18.85mm)	Insulation Height	0.742" (18.85mm)
Contact Length - Post 0.108" (2.75mm)	Contact Length - Post	0.108" (2.75mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-108-02-L-D-742 Payment Methods

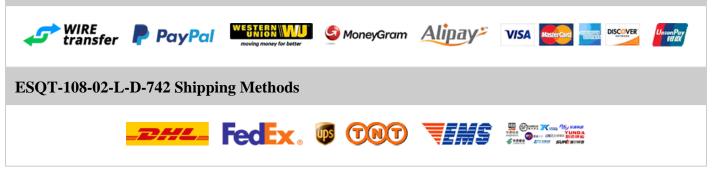

If you have any question about ESQT-108-02-L-D-742, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com