

ESQT-109-02-L-D-730

ESQT-109-02-L-D-730 Information

	David Norrah an	ESOT 100 02 L D 720	
Contraction for Contraction fo	Part Number	ESQT-109-02-L-D-730	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects	二月秋秋時日
		Rectangular Connectors - Headers, Receptacles, Female Sockets	145.83
	Description	ELEVATED 2MM SOCKETS	
	Package	-	回發這幾
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-109-02-L-D-730 Specifications

Manufacturer Part NumberESQT-109-02-L-D-730ManufacturerSantec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeForkedStyleBoard to Board or CableNumber of Positions LoadedAllNumber of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Row Spacing - MatingSolderMounting TypePhongh HoleFerninationSolderContact Finish - MatingGoldContact Finish - MatingJojin (0.25µm)Insulation ColorBlackInsulation Height0.730° (18.54µm)Insulation Height0.120° (3.05µm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeElevated SocketContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - MatingNorge (2.00mm)Mounting TypeThrough HoleFreminationSolderFortart Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJoin (0.25µm)Insulation ColorBlackInsulation Height0.730° (18.54mm)		
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFeXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of PositionsRNumber of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderPrinationSolderForminationSolderForting TypeGoldContact Finish - MatingGoldForting TypeJupin (2.5µm)Forting TypeJupin (2.5µm)Insulation ColorBlackInsulation Height0.730° (18.54mm)	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.730" (18.54mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeOutputContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.730" (18.54mm)	Connector Type	Elevated Socket
Number of Positions18Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Number of Positions	18
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.730" (18.54mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.730" (18.54mm)	Contact Finish - Mating	Gold
Insulation Height 0.730" (18.54mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
-	Insulation Color	Black
Contact Length - Post 0.120" (3.05mm)	Insulation Height	0.730" (18.54mm)
	Contact Length - Post	0.120" (3.05mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-109-02-L-D-730 Payment Methods

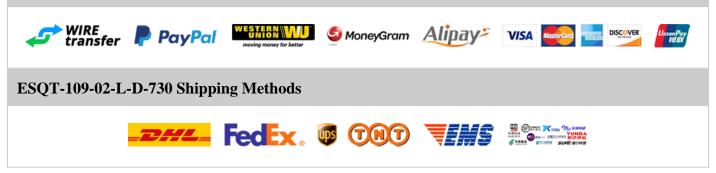

If you have any question about ESQT-109-02-L-D-730, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com