

# ESQT-110-02-F-D-732

# ESQT-110-02-F-D-732 Information

	Part Number	ESQT-110-02-F-D-732	
	Manufacturer		
Heisener.com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	367.5.52
	Package	-	回該設備
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# ESQT-110-02-F-D-732 Specifications

Manufacturer Part NumberESQT-110-02-F-D-732ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldSolderJuin (0.08µm)Insulation ColorBlackInsulation ColorBlackInsulation Height0.732" (18.59mm)Contact Finish - Post0.118" (3.00mm)		
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeForkedContact TypeSoral to Board or CableNumber of Positions0Number of Positions LoadedAllNumber of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.00mm)<		
Indext of the sector of the	Manufacturer	Samtec Inc.
Package-SeriesFleXY2? ESQTConector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorJin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.732" (18.59mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.73" (18.59mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.732" (18.59mm)	Connector Type	Elevated Socket
Yumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.732" (18.59mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldSondart Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Number of Positions	20
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.732" (18.59mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.732" (18.59mm)	Contact Finish - Mating	Gold
Insulation Height 0.732" (18.59mm)	Contact Finish Thickness - Mating	3µin (0.08µm)
	Insulation Color	Black
Contact Length - Post 0.118" (3.00mm)	Insulation Height	0.732" (18.59mm)
	Contact Length - Post	0.118" (3.00mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

## ESQT-110-02-F-D-732 Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### ESQT-110-02-F-D-732 Payment Methods

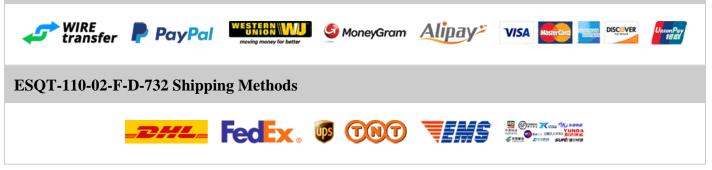

If you have any question about ESQT-110-02-F-D-732, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com