

ESQT-110-02-G-D-440

ESQT-110-02-G-D-440 Information

Heisener.com	Part Number Manufacturer Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	<u></u>
	Package	-	回び没分に
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-110-02-G-D-440 Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions0Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleForminationSolderForstening TypeQuin (0.51µm)Contact Finish - MatingOju (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeInfough HoleTerminationSolderFastening TypeQuin (0.51µm)Contact Finish - MatingGoldContact Finish - MatingJoin (0.51µm)Insulation ColorBlackInsulation Height0.40" (11.18mm)	Manufacturer Part Number	ESQT-110-02-G-D-440		
HeadeageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions0Number of Positions LoadedAllPitch - Mating0.709° (2.00mm)Number of Rows2Row Spacing - Mating0.709° (2.00mm)Number of Rows0.709° (2.00mm)Number of Rows0.700° (2.00	Manufacturer	Samtec Inc.		
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.440" (11.18mm)	Category	Connectors, Interconnects		
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOutper Ole SolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.440" (11.18mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation CelorAud" (11.8mm)	Package	-		
Contact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Series	FleXYZ? ESQT		
StyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingOqlInsulation ColorBlackInsulation Height0.440" (11.18mm)	Connector Type	Elevated Socket		
Number of Positions20Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Contact Type	Forked		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Style	Board to Board or Cable		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2ujin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Number of Positions	20		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Row Spacing - Mating	0.079" (2.00mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Termination	Solder		
Contact Finish Thickness - Mating20μin (0.51μm)Insulation ColorBlackInsulation Height0.440" (11.18mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.440" (11.18mm)	Contact Finish - Mating	Gold		
Insulation Height 0.440" (11.18mm)	Contact Finish Thickness - Mating	20µin (0.51µm)		
-	Insulation Color	Black		
	Insulation Height	0.440" (11.18mm)		
Contact Length - Post 0.410" (10.41mm)	Contact Length - Post	0.410" (10.41mm)		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-110-02-G-D-440 Payment Methods

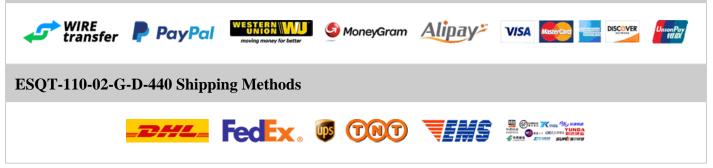

If you have any question about ESQT-110-02-G-D-440, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com