

ESQT-112-02-L-D-309

ESQT-112-02-L-D-309 Information

Heisener.com	Part Number	ESQT-112-02-L-D-309	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	30.000
	Package	-	回診洗 #1
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-112-02-L-D-309 Specifications

ManufacturerSantec Inc.CategoryConnectors, InterconnectsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions Loaded0.079° (2.00mm)Number of Rows2Row Spacing - MatingOidorg '1.00mm)Mouning TypeThrough HoleTarruinationSolderFastening TypeOidolContact Finish - MatingOidolStolerSolderFastening TypeBoard to DataInsulation ColorBackInsulation Finish - MatingOidolContact Finish Thickness - MatingIloui (0.25µm)Insulation Finish Thickness - MatingJosy (7.85mm)Insulation Finish Thickness - MatingJosy (7.85mm)Insulation Finish ThicknessJosy (7.85mm)Insulation Finish ThicknesSolderInsulation Finish ThicknesSolderInsulatio		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSord to Board or CableStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFastening TypeSolderContact Finish - MatingOidIonaut ColorBlackInsulation ColorBlackInsulation Height0.09° (7.85mm)Contact Finish Thickness - MatingSolo? (7.85mm)Ionaut HeightSolo? (7.85mm)Ionaut HeightSolo? (7.85mm)Ionaut HeightSol? Cal?C	Manufacturer Part Number	ESQT-112-02-L-D-309
InstantRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleForminationSolderForsteining TypeQualOndat Cininish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFlcXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeVush-PullContact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting Type0.079° (2.00mm)FerminationSolderForninationSolderContact Finish - MatingOidContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.309° (7.85mm)Contact Length - Post0.541° (13.74mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.04Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature55°C ~ 125°C	Number of Positions	24
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.309" (7.85mm) Contact Length - Post 0.541" (13.74mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature-55°C ~ 125°C	Insulation Height	0.309" (7.85mm)
	Contact Length - Post	0.541" (13.74mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-112-02-L-D-309 Payment Methods

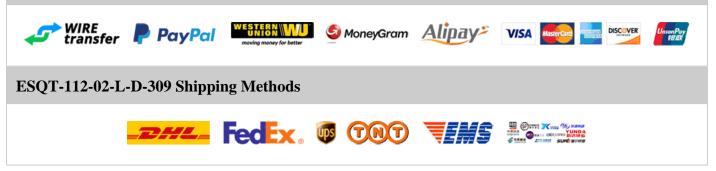

If you have any question about ESQT-112-02-L-D-309, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com