

ESQT-113-03-L-Q-368

ESQT-113-03-L-Q-368 Information

Heisener.com	Part Number Manufacturer Category Description Package	ESQT-113-03-L-Q-368 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
For Reference Only	i ackage	For the pricing/inventory/lead time, please contact us	EIG76374
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-113-03-L-Q-368 Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - MatingSolderMounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingOinf (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.900" (2.29mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079"(2.00mm)Number of Rows4Row Spacing - Mating0.079"(2.00mm)Number of PositionsSolderNumber of Rows4Row Spacing - Mating0.079"(2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368"(9.35mm)Contact Length - Post0.090"(2.29mm)	Manufacturer Part Number	ESQT-113-03-L-Q-368
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFicXY2 RSQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of PositionsS2Number of Positions LoadedAllPich - Mating0.079° (2.00mm)Number of Rows4Rowspacing - Mating0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.00mm)Number of Rows0.009° (2.00mm)	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of PositionsS2Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - MatingDiorgen (2.00mm)Mounting TypeSolderFarminationSolderForstening TypeOutol (2.00mm)Contact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.900" (2.29mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeOn79" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Connector Type	Elevated Socket
Number of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows4Row Spacing - Mating0.079° (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368° (9.35mm)Contact Length - Post0.900° (2.29mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type9kh-PullContact Finish - MatingOddInsulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Number of Positions	52
Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Contact Finish - Mating	Gold
Insulation Height0.368" (9.35mm)Contact Length - Post0.090" (2.29mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post 0.090" (2.29mm)	Insulation Color	Black
-	Insulation Height	0.368" (9.35mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.090" (2.29mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-113-03-L-Q-368 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-113-03-L-Q-368 Payment Methods

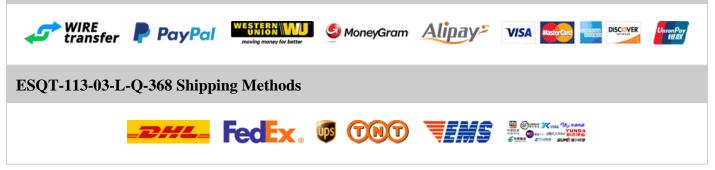

If you have any question about ESQT-113-03-L-Q-368, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com