

ESQT-114-03-H-S-309

ESQT-114-03-H-S-309 Information

		FROT 114 02 H G 200	
Heisener.com	Part Number	ESQT-114-03-H-S-309	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles,	
		Female Sockets	(金融)
	Description	ELEVATED 2MM SOCKETS	- X626.42
	Package	-	- 国際授業(
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-114-03-H-S-309 Specifications

Manufacturer Part NumberESQT-114-03-FH-S-309ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2 FSQTContact TypeElevated SocketContact TypeBoard or CableStyleBoard or CableNumber of PositionsI4Number of Positions LoadedI.Number of Rows1Number of RowsI.Number of RowsI.StyleSolderStateing TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderStateing TypeGold (Orfgun)Contact Finish - MatingSolderStateing TypeSolderStateing TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderStateing TypeSolderContact Finish Thickness - MatingSolor (Starm)Statein ColorBackeIsulation ColorSolor (Starm)Statein Finish Thickness - MatingSolor (Starm)Statein Finish ThicknessSolor (Starm)Statein Finish ThicknessSolor (Starm)Statein Finis			
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderStolar TypeSolderStolar TypeSolderStolar Stolar SolderSolderStolar Stolar SolderSolderStolar Stolar SolderSolderStolar Solder SolderSolderStolar SolderSolder <td>Manufacturer Part Number</td> <td>ESQT-114-03-H-S-309</td>	Manufacturer Part Number	ESQT-114-03-H-S-309	
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedNilPitch - Mating0.079" (2.00mm)Number of Rows1Number of Rows50derTerminationSolderStatening TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldSolder Finish Thickness - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.	
Package-SeriesFeXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOgdContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects	
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllNumber of Rows0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBiackInsulation ChorSolor" (7.55mm)Contact Length - Post0.149" (3.78mm)Contact Fungt55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllNumber of Positions Loaded0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Package	-	
Contact TypeForkedStyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.309° (7.85mm)Contact Length - Post0.149° (3.78mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT	
StyleBoard to Board or CableNumber of Positions14Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post55°C ~ 125°C	Connector Type	Elevated Socket	
Number of Positions 14 Number of Positions Loaded All Number of Positions Loaded 0.079" (2.00mm) Pitch - Mating 0.079" (2.00mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.309" (7.85mm) Contact Length - Post 0.149" (3.78mm)	Contact Type	Forked	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJoµin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable	
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature55°C ~ 125°C	Number of Positions	14	
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All	
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeThrough HoleMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Termination	Solder	
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold	
Insulation Height 0.309" (7.85mm) Contact Length - Post 0.149" (3.78mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)	
Contact Length - Post0.149" (3.78mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.309" (7.85mm)	
	Contact Length - Post	0.149" (3.78mm)	
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C	
	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-114-03-H-S-309 Payment Methods

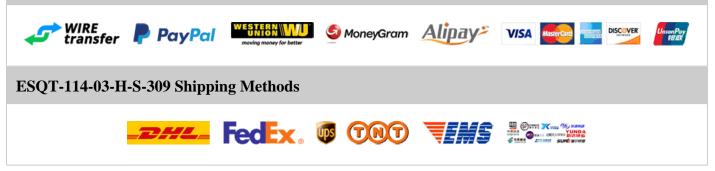

If you have any question about ESQT-114-03-H-S-309, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com