

ESQT-114-03-S-T-375

ESQT-114-03-S-T-375 Information

(A) Heisener.com	Part Number Manufacturer Category	ESQT-114-03-S-T-375 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles,	
Gittal invoce facts they	Description	Female Sockets ELEVATED 2MM SOCKETS	易報題
	Package	- For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-114-03-S-T-375 Specifications

Manufacturer Part NumberESQT-114-03-S-T-375ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard or CableNumber of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - MatingSolderTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldContact Finish Thickness - MatingGoldContact Finish Thickness - MatingSolderContact Finish Thickness - MatingSolderInsulation ColorBlackInsulation FlexifieldSoldsreamentContact Length - PostSolds" (2.11mm)Contact Elemanability RatingII.94 V-0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSord or CableNumber of Positions42Number of Positions LoadedAllNumber of Rows3Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of RowsSolderNouning TypeInfoug HoleYou Spacing - MatingOideSolderSolderContact Finish - MatingOidContact Finish - MatingSolderInsulation ColorBlackInsulation Height0.375° (9.53mm)Contact Length - Post0.083° (2.11mm)Contact FungeratureSolder 2.5°C	Manufacturer Part Number	ESQT-114-03-S-T-375
Indext of the sector of the	Manufacturer	Samtec Inc.
Package-SeriesFicXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions42Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeVush-PullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions42Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows3Row Spacing - Mating0.079° (2.00mm)Mounting TypeOntog HoleFarminationSolderForstening TypeOldContact Finish - MatingGoldContact Finish - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.37s" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions42Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.37s" (2.11mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions42Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.01% (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
Style Board to Board or Cable Number of Positions 42 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 3 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Fastening Type Vinough Hole Contact Finish - Mating Solder Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.375" (9.53mm) Contact Length - Post 0.083" (2.11mm) Operating Temperature -55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 42 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 3 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.375" (9.53mm) Contact Length - Post 0.083" (2.11mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Positions	42
Number of Rows3Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Rows	3
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.375" (9.53mm) Contact Length - Post 0.083" (2.11mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.375" (9.53mm)
	Contact Length - Post	0.083" (2.11mm)
Material Flammability Rating UIL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-114-03-S-T-375 Payment Methods

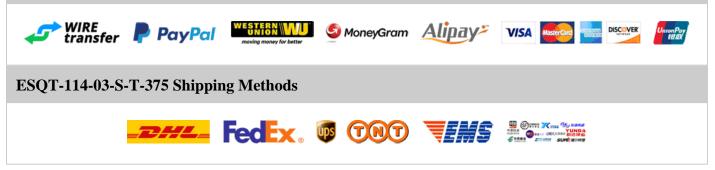

If you have any question about ESQT-114-03-S-T-375, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com