

ESQT-116-03-F-Q-355

ESQT-116-03-F-Q-355 Information

Heisener.com	Manufacturer Category Description	ESQT-116-03-F-Q-355 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
	Package	- For the pricing/inventory/lead time, please contact	E13615-276
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-116-03-F-Q-355 Specifications

Manufacturer Part NumberESQT-116-03-F-Q-355ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeBoard or CableStyleBoard or CableNumber of Positions LoadedAlNumber of Positions LoadedAlNumber of Rows4Row Spacing - Mating0.079" (2.00mm)Munting TypeThrough HoleForniuting TypeSolderContact Finish - MatingSolderContact Finish - MatingGoldStation ColorBlackForstart Finish - MatingSolderForstart Finish - MatingGoldContact Finish - MatingSolderForstart Finish - MatingSolderContact Finish - MatingSolderFinish - MatingGoldContact Finish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolderContact Finish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolderContact Finish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolderFinish - MatingSolder<		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSord or CableStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllNumber of Rows4Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of RowsSolderYoung TypeSolderSteining TypeSolderContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorBlackInsulation FlexingSing (0.08µm)Insulation FlexingSing (0.08µm)Insulation FlexingSing (0.02µm)Contact Finish Thickness - MatingSing (0.08µm)Insulation FlexingSing (0.08µm)Insulation FlexingSing (0.02µm)Contact Finish Thicknes - MatingSing (0.02µm)Insulation FlexingSing (0.02µm)Contact Length - Post0.103° (2.02µm)Contact Length - Post0.103° (2.02µm)Contact Finish ThicknesSing (0.02µm)Contact Finish ThicknesSing (0.02µm)Contact Finish ThicknesSing (0.02µm)Contact Length - PostSing (0.02µm)Contact Length - PostSing (0.22µm)Contact Length - PostSing (0.22µm)Contact Length - PostSing (0.22µm)Contact Length - PostSing (0.22µm)<	Manufacturer Part Number	ESQT-116-03-F-Q-355
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish FinisherSili (0.08µm)Fastening TypeBush PullContact Finish FinisherSili (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package.SeriesFicXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeDiologuTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Contact Funsh ThicknessSister (9.25°C)	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeOntog "Guomm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.35s" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Operating Temperature-55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Number of Positions	64
Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.355" (9.02mm)Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.355" (9.02mm) Contact Length - Post 0.103" (2.62mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	3μin (0.08μm)
Contact Length - Post0.103" (2.62mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.355" (9.02mm)
	Contact Length - Post	0.103" (2.62mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-116-03-F-Q-355 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-116-03-F-Q-355 Payment Methods

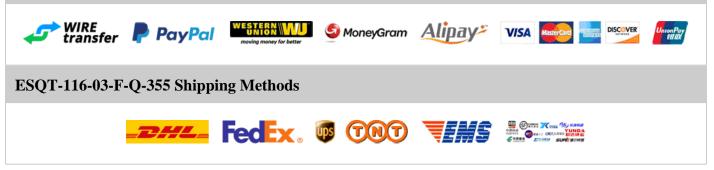

If you have any question about ESQT-116-03-F-Q-355, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com