

ESQT-117-02-L-D-330

ESQT-117-02-L-D-330 Information

Part Number Manufacturer Category	ESQT-117-02-L-D-330 Samtec Inc. Connectors, Interconnects	
	Rectangular Connectors - Headers, Receptacles, Female Sockets	
Description	ELEVATED 2MM SOCKETS	
Package	-	国本部委員会
	For the pricing/inventory/lead time, please contact	
For Reference Only	Website: https://www.heisener.com	Request a Quote
	Manufacturer Category Description	ManufacturerSamtec Inc.CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsDescriptionELEVATED 2MM SOCKETSPackage-For the pricing/inventory/lead time, please contact us

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-117-02-L-D-330 Specifications

Manufacturer Part NumberESQT-117-02-L-D-330ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeForkedStyleBoard or CableNumber of Positions34Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Leight0.30" (8.38mm)Contact Length - Post0.520" (13.21mm)Contact Length - Post-55" C - 125"CVariation Ender-55" C - 125" C		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series FleXYZ? ESQT Connector Type Elevated Socket Contact Type Board to Board or Cable Style Board to Board or Cable Number of Positions 34 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Through Hole Youngh Hole Solder Termination Solder Contact Finish - Mating Gold Contact Finish Thickness - Mating Iptin (0.25µm) Insulation Cloor Black Insulation Height 0.330" (8.38mm) Contact Length - Post Scyc' (13.21mm)	Manufacturer Part Number	ESQT-117-02-L-D-330
Image: PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingInjuin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)	Manufacturer	Samtec Inc.
Package-SeriesFicXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeVunber Ole ColleContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingIlojin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeTorough HoleTerminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.30" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (.00mm)Number of Rows2Row Spacing - Mating0.079" (.00mm)Mounting TypeThrough HoleFarminationSolderContact Finish - Mating0.04Contact Finish - MatingIopin (0.25µm)Insulation ColorBlackInsulation Height0.30" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.04Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 34 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 10µin (0.25µm) Insulation Color Black Insulation Height 0.330" (8.38mm) Contact Length - Post 0.520" (13.21mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post55°C ~ 125°C	Number of Positions	34
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.330" (8.38mm)Contact Length - Post0.520" (13.21mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.330" (8.38mm) Contact Length - Post 0.520" (13.21mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post 0.520" (13.21mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.330" (8.38mm)
	Contact Length - Post	0.520" (13.21mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-117-02-L-D-330 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-117-02-L-D-330 Payment Methods

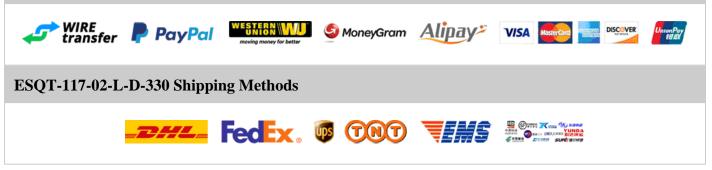

If you have any question about ESQT-117-02-L-D-330, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com