

ESQT-120-03-F-D-345

ESQT-120-03-F-D-345 Information

Heisener.com	Part Number Manufacturer Category Description	ESQT-120-03-F-D-345 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
	Package	-	自然是
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-120-03-F-D-345 Specifications

ManufacturerSantec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of RowsSolderFerninationSolderFortand TypeManufacturedGondart Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Finish - MatingSolderInsulation Finish - MatingSolderContact Finish Thickness - MatingSolderInsulation Finish - Mating <t< th=""><th></th><th></th></t<>		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.019" (2.00mm)FreminationSolderForseining TypeInsugli HoleForseining TypeOsderInsulation ColorBiakInsulation ColorBiakInsulation Height0.345" (8.76mm)Contact Finish Posti0.345" (8.76mm)	Manufacturer Part Number	ESQT-120-03-F-D-345
Icctangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFlcXY2; ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079°(2.00mm)Number of Rows2Rows Spacing - Mating0.079°(2.00mm)Number of Positions0.079°(2.00mm)Number of Rows0.079°(2.00mm)Pitch - Mating0.079°(2.00mm)Number of Rows0.019°(2.00mm)Number of Rows <td>Manufacturer</td> <td>Samtec Inc.</td>	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSolderFarminationSolderForstening TypeGoldContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Connector Type	Elevated Socket
Number of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type9ush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Number of Positions	40
Number of Rows2Number of Rows0.079" (2.00mm)Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Contact Finish - Mating	Gold
Insulation Height0.345" (8.76mm)Contact Length - Post0.113" (2.87mm)	Contact Finish Thickness - Mating	3µin (0.08µm)
Contact Length - Post 0.113" (2.87mm)	Insulation Color	Black
-	Insulation Height	0.345" (8.76mm)
	Contact Length - Post	0.113" (2.87mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-120-03-F-D-345 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-120-03-F-D-345 Payment Methods

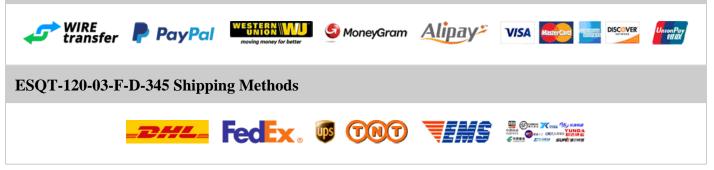

If you have any question about ESQT-120-03-F-D-345, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com