

ESQT-121-02-M-Q-309

ESQT-121-02-M-Q-309 Information

Heisener.com	Part Number Manufacturer Category Description Package	ESQT-121-02-M-Q-309 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
For Reference Only	-	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-121-02-M-Q-309 Specifications

Manufacturer Part NumberESQT-121-02-M-Q-309ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTContact TypeElevated SocketContact TypeBoard or CableNumber of Positions84Number of Positions LoadedAllNumber of Rows4Number of RowsSolderMounting TypeDiroy (2.00mm)Mounting TypeSolderFastening TypeOildContact Finish MatingGoldContact Finish Thickness - MatingGoldContact Finish Thickness - MatingJoin (0.51µm)Contact Length - PostJoins(0.51µm)Contact Length - PostJoins(0.51µm)Contact Length - PostSoley (7.85mm)Contact Length - PostJoins(7.85mm)Contact Length - Po		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllNumber of Rows4Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of RowsSolderNouning TypeSolderFerninationSolderContact Finish - MatingOidContact Finish - MatingGoldInsulation ColorBlackInsulation FlexesJoup (7.85mm)Insulation Flexes0.030° (7.85mm)Contact Length - Post0.50° (2.0°CStraing TypeSolderSolderSolderStraing TypeSolderStraing TypeSolderContact Finish Thickness - MatingSolderStraing TypeSolderStraing Type <td>Manufacturer Part Number</td> <td>ESQT-121-02-M-Q-309</td>	Manufacturer Part Number	ESQT-121-02-M-Q-309
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeOnder HoleTerminationSolderFastening TypeOusf NoteGoldGuldContact Finish - MatingOujen (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFlcXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeDioder GouldFerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJojm (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type9uh-PuhlContact Finish - MatingGoldContact Finish - Mating2uju (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingOujn (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact Type Forked Style Board to Board or Cable Number of Positions 84 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 4 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Qojun (0.51µm) Insulation Color Black Insulation Height 0.309" (7.85mm) Contact Length - Post 0.541" (13.74mm) Operating Temperature -55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions84Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJouri (0.51µm)Insulation ColorBlackInsulation Height0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Number of Positions	84
Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.309" (7.85mm)Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.309" (7.85mm) Contact Length - Post 0.541" (13.74mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	20µin (0.51µm)
Contact Length - Post0.541" (13.74mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.309" (7.85mm)
	Contact Length - Post	0.541" (13.74mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-121-02-M-Q-309 Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

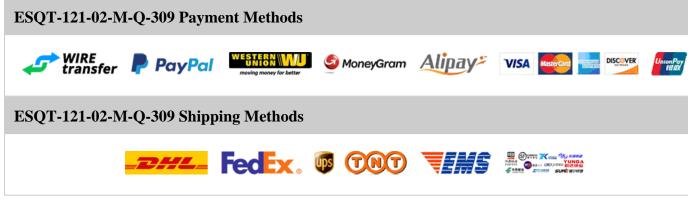

If you have any question about ESQT-121-02-M-Q-309, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com