

ESQT-124-03-L-D-394

ESQT-124-03-L-D-394 Information

	Part Number	ESQT-124-03-L-D-394	
Heisener.com	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	12.21
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-124-03-L-D-394 Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions Loaded0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedOr79" (2.00mm)Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleStolerStoler	Manufacturer Part Number	ESQT-124-03-L-D-394
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedO.079" (2.00mm)Number of Rows2Row Spacing - MatingO.079" (2.00mm)Mounting TypeThrough HoleSolderSolder	Manufacturer	Samtec Inc.
Package-Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleSolderSolder	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Connector Type	Elevated Socket
Number of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Number of Positions	48
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolder	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolder	Number of Rows	2
Termination Solder	Row Spacing - Mating	0.079" (2.00mm)
	Mounting Type	Through Hole
	Termination	Solder
Fastening Type Push-Pull	Fastening Type	Push-Pull
Contact Finish - Mating Gold	Contact Finish - Mating	Gold
Contact Finish Thickness - Mating 10µin (0.25µm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Insulation Color Black	Insulation Color	Black
Insulation Height 0.394" (10.00mm)	Insulation Height	0.394" (10.00mm)
Contact Length - Post 0.064" (1.63mm)	Contact Length - Post	0.064" (1.63mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-124-03-L-D-394 Payment Methods

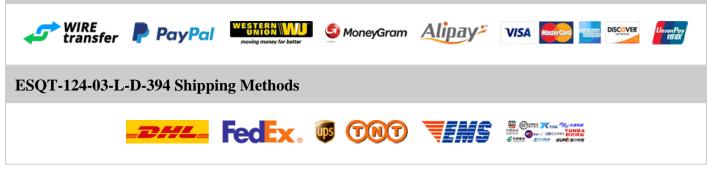

If you have any question about ESQT-124-03-L-D-394, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com