

ESQT-126-03-F-D-375

ESQT-126-03-F-D-375 Information

Heisener.com		ESQT-126-03-F-D-375	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	一 目前200日 5日月前2日 10日月前日 10日月前日
	Description	ELEVATED 2MM SOCKETS	
	Package	-	- 回診療療(
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-126-03-F-D-375 Specifications

Manufacturer Part NumberESQT-126-03-F-D-375ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerninationSolderFastening TypeFuroy HoleContact Finish - MatingGoldContact Finish - MatingGoldSolderSolderFastening TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - Mating3jin (0.08µm)Contact Finish Thickness - Mating3jir (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Finish Thickness0.083" (2.11mm)Operating Fenperature-55°C ~ 125°CMaterial Flammability RatingUL94 V-0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? EQTConnector TypeElevated SocketContact TypeForkedSortedSocketStyleBoard to Board or CableNumber of PositionsS2Number of Positions LoadedAllNumber of Rows2Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of RowsSolderPreminationSolderSolderSolderContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorBackInsulation ColorBackInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation ColorSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation ColorSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolder<	Manufacturer Part Number	ESQT-126-03-F-D-375
Package.SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingJolderMounting TypeThrough HoleFreminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - MatingJiii (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFlcXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.37s" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact Type Forked Style Board to Board or Cable Number of Positions 52 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.375" (9.53mm) Contact Length - Post 0.083" (2.11mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeOn79" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post50°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 52 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Fastening Type Number of Rows Fortunation Solder Fortunation Solder Contact Finish - Mating Gold Contact Finish Thickness - Mating Juin (0.08µm) Insulation Color Black Insulation Height 0.375" (9.53mm) Contact Length - Post 0.083" (2.11mm) Operating Temperature -55°C ~ 125°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Positions	52
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.375" (9.53mm)Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	3µin (0.08µm)
Contact Length - Post0.083" (2.11mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.375" (9.53mm)
	Contact Length - Post	0.083" (2.11mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-126-03-F-D-375 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-126-03-F-D-375 Payment Methods

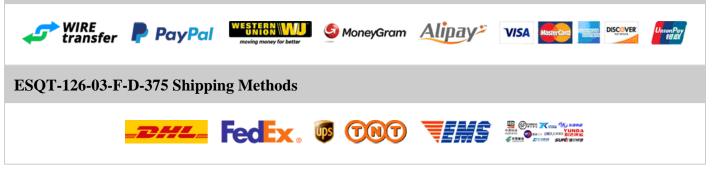

If you have any question about ESQT-126-03-F-D-375, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com