

ESQT-126-03-M-D-350

ESQT-126-03-M-D-350 Information

Heisener.com	Part Number Manufacturer Category Description Package	ESQT-126-03-M-D-350 Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets ELEVATED 2MM SOCKETS	
For Reference Only	-	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-126-03-M-D-350 Specifications

Manufacturer Part NumberESQT-126-03-M-D-350ManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeBoard or CableStyleBoard or CableNumber of Positions52Number of Rows2Number of Rows0,079° (2.00mm)Number of Rows0,079° (2.00mm)Munufing TypeHrough HoleTerminationSolderStatening TypeOid (0.51µm)Contact Finish - Mating0.010° (0.51µm)Insulation ColorBickStatening TypeOid (0.51µm)Contact Finish Thickness - Mating0.350° (8.89mm)Contact Finish Thickness - Mating0.55° < 125°CMaterial Flammability RatingUL94 V-0		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series FleXYZ? ESQT Connector Type Elevated Socket Contact Type Forked Contact Type Board to Board or Cable Number of Positions 52 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.079° (2.00mm) Mounting Type Through Hole Youngh Type Solder Fermination Solder Contact Finish - Mating Oupin (0.51µm) Contact Finish Thickness - Mating Oupin (0.51µm) Insulation Color Black Insulation Height 0.350° (8.89mm) Ontact Length - Post 0.108° (2.75mm)	Manufacturer Part Number	ESQT-126-03-M-D-350
Package.SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Contact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.30" (8.89mm)Contact Length - PostJuins" (2.75mm)Operating Temperature-55" C~ 125"C	Manufacturer	Samtec Inc.
Package-SeriesFeXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mn)Contact Length - Post0.108" (2.75mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeVanh-PullContact Finish - MatingSolderInsulation ColorJouin (0.51µm)Insulation Height0.350" (8.89mm)Contact Length - Post.018" (2.75mm)Operating Temperature.55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingOidIontact Finish Thickness - MatingOidyn (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions52Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 52 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Dorgy" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.350" (8.89mm) Contact Length - Post 0.108" (2.75mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature55°C ~ 125°C	Number of Positions	52
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2/µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.350" (8.89mm) Contact Length - Post 0.108" (2.75mm) Operating Temperature -55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.350" (8.89mm) Contact Length - Post 0.108" (2.75mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	20µin (0.51µm)
Contact Length - Post 0.108" (2.75mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.350" (8.89mm)
	Contact Length - Post	0.108" (2.75mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

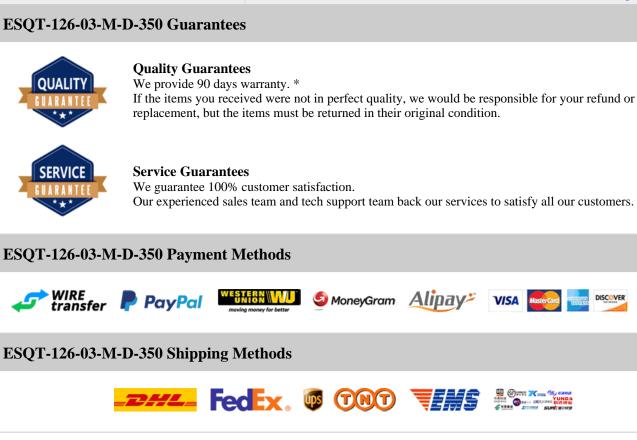

If you have any question about ESQT-126-03-M-D-350, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com