

ESQT-128-02-L-D-425

ESQT-128-02-L-D-425 Information

	Part Number	ESQT-128-02-L-D-425	
Heisener.com	Manufacturer		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	
	Package	-	- 国際管機
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-128-02-L-D-425 Specifications

Manufacturer Part NumberESQT-128-02-L-D-425ManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesFleXYZ? ESQTConnector TypeElvated SocketContact TypeBoard to Board or CableNumber of PositionsS6Number of Positions LoadedAllNumber of Rows2Number of Rows0.079° (2.00mn)Number of RowsSolderNumber of RowsSolderNumber of RowsSolderStreing TypeSolderNumber of RowsSolderStreing TypeSolderStreing Type<		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketConnector TypeElevated SocketContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFreminationSolderFastening TypeOsdContact Finish - MatingGoldContact Finish - MatingIlpuin (0.5µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Manufacturer Part Number	ESQT-128-02-L-D-425
IdentifyRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedSorder OrableSochetNumber of PositionsSoNumber of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingNorg" (2.00mm)Number of RowsSolderForninationSolderRow Spacing - MatingSolderContact Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingBickInsulation ColorBickInsulation HeightSolder	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingIojun (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingInpin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.019" (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.425" (10.80mm)	Connector Type	Elevated Socket
Number of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldRouter Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Number of Positions	56
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.425" (10.80mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.425" (10.80mm)	Contact Finish - Mating	Gold
Insulation Height 0.425" (10.80mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
	Insulation Color	Black
	Insulation Height	0.425" (10.80mm)
Contact Length - Post 0.425" (10.80mm)	Contact Length - Post	0.425" (10.80mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-128-02-L-D-425 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-128-02-L-D-425 Payment Methods

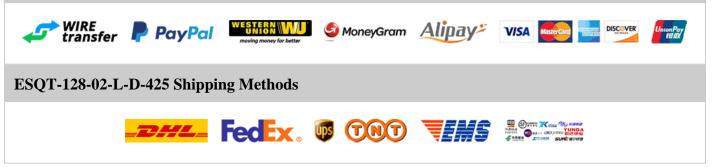

If you have any question about ESQT-128-02-L-D-425, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com