

# ESQT-130-02-L-D-669

### ESQT-130-02-L-D-669 Information

Heisener.com	Part Number	ESQT-130-02-L-D-669	
	Manufacturer	Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# ESQT-130-02-L-D-669 Specifications

Manufacturer Part NumberESQT-130-02-L-D-669ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish - MatingGold		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSolderForminationSolderForninationGoldContact Finish - MatingGoldContact Finish Thickness - MatingDipin (0.25µm)	Manufacturer Part Number	ESQT-130-02-L-D-669
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thitckness - Mating10µin (0.25µm)	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldIoutact Finish Thtickness - Mating10µin (0.25µm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - Mating0.019" (0.25µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldLonzer Finish Thickness - Mating10µin (0.25µm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.019Jupin (0.25µm)Jupin (0.25µm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldYour Contact Finish Thickness - Mating10µin (0.25µm)	Connector Type	Elevated Socket
Number of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating10µin (0.25µm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - Mating10µin (0.25µm)	Number of Positions	60
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)	Termination	Solder
Contact Finish Thickness - Mating 10µin (0.25µm)	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	10μin (0.25μm)
Insulation Color Black	Insulation Color	Black
Insulation Height 0.669" (17.00mm)	Insulation Height	0.669" (17.00mm)
Contact Length - Post 0.181" (4.60mm)	Contact Length - Post	0.181" (4.60mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?






### **Quality Guarantees**

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

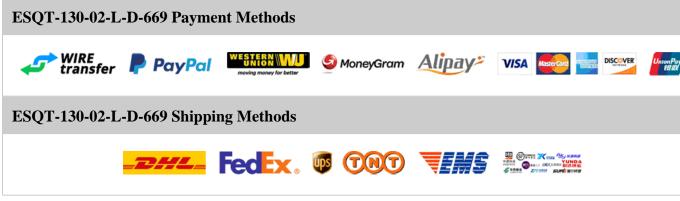

If you have any question about ESQT-130-02-L-D-669, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com