

# ESQT-130-03-L-D-368

### ESQT-130-03-L-D-368 Information

	Part Number	ESQT-130-03-L-D-368	
Heisener.com	Manufacturer		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	547642
	Package	-	- 国際活動的
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# ESQT-130-03-L-D-368 Specifications

Manufacturer Part NumberESQ1-130-05-L-D-368ManufacturerSantec Inc.CategoryConnectors, InterconnectsPackage-SeriesFleXt2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuid (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)Contact Length - Post0.000° (2.29mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeNorgh HoleTerminationSolderFastening TypeQualGoldGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)	Manufacturer Part Number	ESQT-130-03-L-D-368
HeadeageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.0	Manufacturer	Samtec Inc.
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeOklerContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOutper JulieContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldIontact Finish Thickness - MatingBlackInsulation CelorBlack" (9.35mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.368" (9.35mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Connector Type	Elevated Socket
Number of Positions60Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation Height0.368" (9.35mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Number of Positions	60
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.368" (9.35mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.368" (9.35mm)	Contact Finish - Mating	Gold
Insulation Height 0.368" (9.35mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
	Insulation Color	Black
Contact Length - Post 0.090" (2.29mm)	Insulation Height	0.368" (9.35mm)
	Contact Length - Post	0.090" (2.29mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# ESQT-130-03-L-D-368 Payment Methods

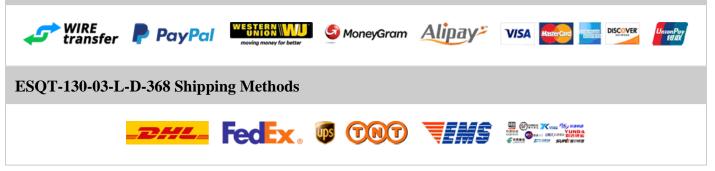

If you have any question about ESQT-130-03-L-D-368, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com