

ESQT-133-02-L-D-720

ESQT-133-02-L-D-720 Information

	Part Number	ESQT-133-02-L-D-720	
Heisener.com	Manufacturer		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	5000 522
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-133-02-L-D-720 Specifications

Manufacturer Part NumberESQT-133-02-L-D-720ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard or CableNumber of Positions66Number of Positions LoadedAllPict - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingOil (0.5µm)Insulation ColorBlackInsulation ColorBlackInsulation Finish Thickness - Mating0.130" (3.30mm)Contact Length - Post0.130" (3.30mm)Contact Elemanability RatingU.94 V-0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeSord to Board or CableNumber of Positions66Number of Positions LoadedAllNumber of Positions Loaded0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.00mm)FreminationSolderForten TypeMachalent EducationForten TypeOnderNouting TypeSolderContact Finish - MatingOidContact Finish - MatingInjun (0.25µm)Insulation ColorBlackInsulation Height0.720° (18.30mm)Contact Length - Post0.130° (3.00mm)Contact Funder FostSice - 125°C	Manufacturer Part Number	ESQT-133-02-L-D-720
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Routing TypeBackContact Finish Thickness - Mating0.720" (18.30mm)Insulation ColorBlackInsulation Height0.720" (2.30mm)Contact Length - Post0.130" (3.00mm)Contact Fungerature55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFicXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Your Spacing - Mating0.079" (2.00mm)Your Spacing - Mating0.079" (2.00mm)Your Spacing - MatingSolderYour Spacing - MatingSolderYour Spacing - MatingGoldYour Spacing - MatingInjun (0.25µm)Your Spacing - MatingInjun (0.30mm)Your Spacing - MatingInjun (0.30mm)Your Spacing - Mating - SpS° - 12S°CYour Spacing - SpS° - 12S°C	Category	Connectors, Interconnects
SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting TypeOntog HoleFarminationSolderForstening TypeOldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.720° (18.30mm)Contact Length - Post0.130° (3.30mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPitch - Mating0.079" (.00mm)Number of Rows2Row Spacing - Mating0.079" (.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.019" (0.05µm)Insulation ColorBlackInsulation Height0.70" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.010" (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions66Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Connector Type	Elevated Socket
Number of Positions 66 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 10µin (0.25µm) Insulation Color Black Insulation Height 0.720" (18.30mm) Contact Length - Post 0.130" (3.30mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.720" (18.30mm)Contact Length - Post0.130" (3.20mm)Operating Temperature-55°C ~ 125°C	Number of Positions	66
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.720" (18.30mm)Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.720" (18.30mm) Contact Length - Post 0.130" (3.30mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.130" (3.30mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.720" (18.30mm)
	Contact Length - Post	0.130" (3.30mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-133-02-L-D-720 Payment Methods

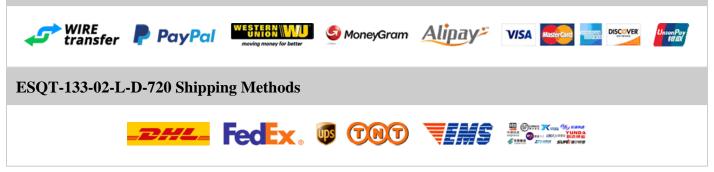

If you have any question about ESQT-133-02-L-D-720, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com