

ESQT-136-02-GF-D-400

ESQT-136-02-GF-D-400 Information

	Manufacturer		ा भाष ा ज
Contraction of the second seco	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	i Stran
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.bsice.org.com	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-136-02-GF-D-400 Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.51µm)Contact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeElevated SocketContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingBiakaInsulation ColorBiackInsulation Height0.400" (10.16mm)	Manufacturer Part Number	ESQT-136-02-GF-D-400	
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFeXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderPrinnationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorJuin (0.51µm)Insulation ColorBlackInsulation Height0.400° (10.16mm)	Manufacturer	Samtec Inc.	
Package-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.400" (10.16mm)	Category	Connectors, Interconnects	
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeOutputContact Finish - MatingGoldContact Finish Thickness - MatingJouin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Package	-	
Contact TypeForkedStyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.01Contact Finish Thickness - Mating0.01Insulation ColorBlackInsulation Height0.400" (10.16mm)	Series	FleXYZ? ESQT	
StyleBoard to Board or CableNumber of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.400" (10.16mm)	Connector Type	Elevated Socket	
Number of Positions72Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Contact Type	Forked	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Style	Board to Board or Cable	
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Number of Positions	72	
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Number of Positions Loaded	All	
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Row Spacing - Mating	0.079" (2.00mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Termination	Solder	
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.400" (10.16mm)	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.400" (10.16mm)	Contact Finish - Mating	Gold	
Insulation Height 0.400" (10.16mm)	Contact Finish Thickness - Mating	20µin (0.51µm)	
-	Insulation Color	Black	
Contract Longth Dest $0.450" (11.42mm)$	Insulation Height	0.400" (10.16mm)	
Contact Lengui - Fost 0.430 (11.431111)	Contact Length - Post	0.450" (11.43mm)	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

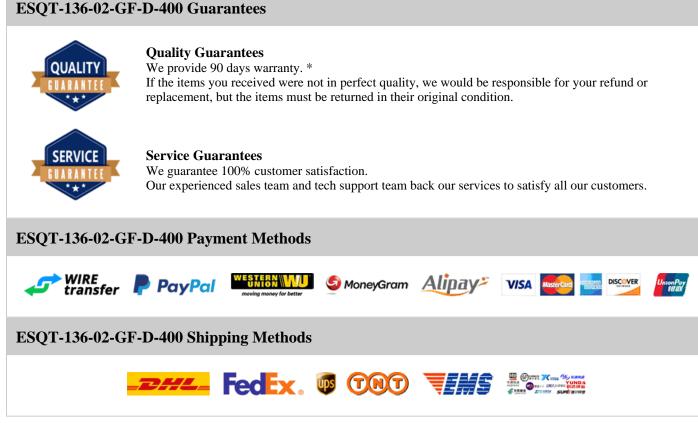

If you have any question about ESQT-136-02-GF-D-400, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com