

ESQT-150-03-L-Q-350

ESQT-150-03-L-Q-350 Information

Heisener.com	Part Number Manufacturer	ESQT-150-03-L-Q-350 Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED 2MM SOCKETS	
	Package	-	「国営業業務員
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESQT-150-03-L-Q-350 Specifications

Manufacturer Part NumberESQT-150-03-L-Q-350ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXYZ? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions200Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldNumber of PositionsGoldIterminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)Contact Length - Post0.108" (2.75mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketConnector TypeSorder Goald of CableStyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPrich - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows6.014ForninationSolderForninationGolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.350" (8.89mm)		
Include Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows4Row Spacing - Mating0.079° (2.00mn)Number of Rows0.079° (2.00mn)Number of RowsSolderPitch - MatingO.079° (2.00mn)Number of RowsSolderPitch - MatingGolderNourting TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorJinku (2.5µm)Insulation HeightSolson (8.8mm)	Manufacturer	Samtec Inc.
Package-SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.350" (8.89mm)	Category	Connectors, Interconnects
SeriesFleXY2? ESQTConnector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Package	-
Contact TypeForkedStyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Series	FleXYZ? ESQT
StyleBoard to Board or CableNumber of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.350" (8.89mm)	Connector Type	Elevated Socket
Number of Positions200Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Number of Positions	200
Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Termination	Solder
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.350" (8.89mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.350" (8.89mm)	Contact Finish - Mating	Gold
Insulation Height 0.350" (8.89mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
-	Insulation Color	Black
Contact Length - Post 0.108" (2.75mm)	Insulation Height	0.350" (8.89mm)
	Contact Length - Post	0.108" (2.75mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESQT-150-03-L-Q-350 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESQT-150-03-L-Q-350 Payment Methods

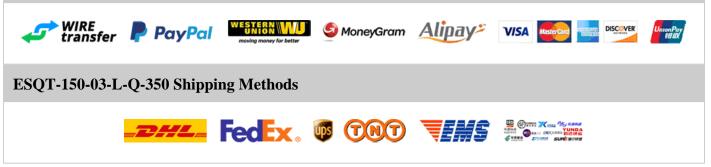

If you have any question about ESQT-150-03-L-Q-350, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com