

ESW-105-33-L-S-03

ESW-105-33-L-S-03 Information

	Part Number Manufacturer	ESW-105-33-L-S-03 Samtec Inc.	
Container com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	■26368 ■2556189823 926418983
	Description	ELEVATED SOCKET STRIPS	
	Package	-	国際援業に
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-105-33-L-S-03 Specifications

Manufacturer Part NumberESW-105-33-L-S-03ManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedSorder Or Positions5Number of Positions Loaded4Number of Rows0.100° (2.54mm)Number of Rows1Number of RowsSolderTerminationSolderFastening TypeSolderContact Finish - MatingGoldSolder Finish - MatingGoldContact Finish - MatingGoldSolder Finish - MatingGoldContact Finish - MatingGoldSolder Fin		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketConnector TypeForkedContact TypeBoard to BoardStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100"(2.54mm)Number of Rows1Number of Rows1Row Spacing - Mating-Young TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation FieldsMacmandeInsulation FieldsMacmandeContact Finish Thickness - Mating0.009" (2.29mm)Contact Length - Post0.009" (2.29mm)	Manufacturer Part Number	ESW-105-33-L-S-03
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderYouring TypePinchy HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIojún (0.25µm)Insulation ColorBlackInsulation Height0.635° (16.13mm)Contact Length - Post0.090° (2.29mm)	Manufacturer	Samtec Inc.
Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuid (0.25µm)Contact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.635° (16.13mm)Contact Length - Post0.900° (2.29mm)	Category	Connectors, Interconnects
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderForntart Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingInpuin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.909" (2.29mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.900" (2.29mm)	Series	ESW
StyleBoard to BoardNumber of Positions5Number of Positions Loaded4Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Connector Type	Elevated Socket
Number of Positions5Number of Positions Loaded4Pitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Contact Type	Forked
Number of Positions Loaded4Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.900" (2.29mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationSolderFastening TypePush-PullContact Finish - MatingOdiInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.900" (2.29mm)	Number of Positions	5
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Number of Positions Loaded	4
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Fungt - Post0.090" (2.29mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Contact Finish - Mating	Gold
Insulation Height 0.635" (16.13mm) Contact Length - Post 0.090" (2.29mm)	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post 0.090" (2.29mm)	Insulation Color	Black
-	Insulation Height	0.635" (16.13mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.090" (2.29mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESW-105-33-L-S-03 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-105-33-L-S-03 Payment Methods

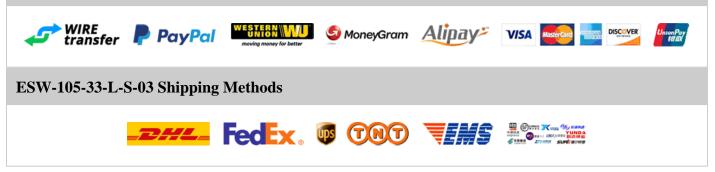

If you have any question about ESW-105-33-L-S-03, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com