

ESW-110-24-T-D

ESW-110-24-T-D Information

Heisener.com	Part Number Manufacturer	ESW-110-24-T-D Samtec Inc	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED SOCKET STRIPS	- Detaini
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-110-24-T-D Specifications

Manufacturer Part NumberESW-110-24-T-DManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesESWConnector TypeElevated SocketContact TypeSorded SocketStyleBoard to BoardNumber of Positions20Number of Rows2Row Spacing - Mating0.100" (2.54mm)Number of Rows0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeSolderContact Finish - Mating-Contact Finish Thickness - Mating-Contact		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketConnector TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSolderForminationSolderForminationSolderForminationSolderFornity Finish - Mating-Insulation ColorBiackInsulation Height0.535° (13.60mm)	Manufacturer Part Number	ESW-110-24-T-D
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Manufacturer	Samtec Inc.
Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - Mating9.100" (2.54mm)Contact Finish - MatingSolderIf and the SolderSolderIf and the SolderTinContact Finish - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Category	Connectors, Interconnects
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeInContact Finish - Mating-Insulation ColorBlackInsulation Height0.535° (13.60mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535° (13.60mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating.Insulation ColorBlackInsulation Height0.535" (13.60mm)	Series	ESW
StyleBoard to BoardNumber of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Connector Type	Elevated Socket
Number of Positions20Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Number of Positions	20
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Mounting Type	Through Hole
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.535" (13.60mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.535" (13.60mm)	Contact Finish - Mating	Tin
Insulation Height 0.535" (13.60mm)	Contact Finish Thickness - Mating	-
	Insulation Color	Black
Contact Length Post 0.380" (9.65mm)	Insulation Height	0.535" (13.60mm)
Contact Length - 1 0st 0.380 (9.05mm)	Contact Length - Post	0.380" (9.65mm)
Operating Temperature $-55^{\circ}C \sim 105^{\circ}C$	Operating Temperature	-55°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESW-110-24-T-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-110-24-T-D Payment Methods

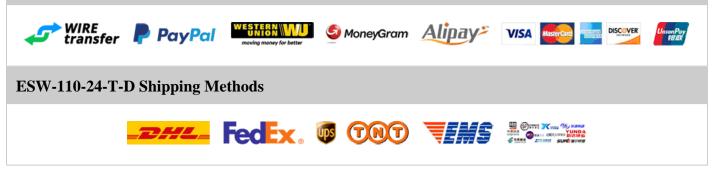

If you have any question about ESW-110-24-T-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com