

ESW-113-14-G-D-LL

ESW-113-14-G-D-LL Information

Heisener.com	Part Number	ESW-113-14-G-D-LL		
	Manufacturer	Samtec Inc.		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets		
	Description	ELEVATED SOCKET STRIPS		
	Package	-	「回帰之影	
For Reference Only		For the pricing/inventory/lead time, please contact		
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-113-14-G-D-LL Specifications

ManufacturerSantec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPich - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeInfough HoleTerminationSolder In, SolderForther Jinsh Hufting0.100° (2.54mm)Contact Finish - Mating0.100° (2.54mm)Mounting TypeSolder Infough HoleContact Finish - Mating0.100° (2.54mm)Contact Finish - MatingGoldContact Finish - MatingGoldSolder Infough HoleSolder Infough HoleContact Finish - MatingGoldInsulation ColorBackInsulation Height0.435° (11.05mm)Contact Length - Post0.480° (12.19mm)Operating Temperature55° C~ 125°C			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedContact TypeBoard to BoardNumber of Positions26Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFreminationSinked Pin, SolderFortact Finish - MatingOidContact Finish - MatingGoldContact Finish - MatingJouin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Contact Length - Post0.58°C - 125°C	Manufacturer Part Number	ESW-113-14-G-D-LL	
Ackage.SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeQuin (0.51µm)Contact Finish - MatingGoldContact Finish Thickness - MatingQuin (0.51µm)Insulation ColorBlackInsulation Height0.435° (11.05mm)Contact Length - Post0.480° (12.19mm)Contact Length - Post0.480° (12.19mm)Contact Tinish Thicknes55°C ~ 125°C	Manufacturer	Samtec Inc.	
Package.SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOldContact Finish - MatingOldContact Finish Thickness - MatingOldin (5.1µm)Insulation ColorBlackInsulation Height0.435° (11.05mm)Contact Length - Post0.480° (12.19mm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects	
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOudContact Finish - MatingGoldContact Finish - MatingJujin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderGontact Finish - Mating0.90Outor Chrish - MatingOudInsulation ColorJuni (0.51µm)Insulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Package	-	
Contact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - Mating0.00Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (2.19mm)Operating Temperature-55°C ~ 125°C	Series	ESW	
Style Board to Board Number of Positions 26 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Farmination Kinked Pin, Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.435" (11.05mm) Contact Length - Post 0.480" (12.19mm)	Connector Type	Elevated Socket	
Number of Positions 26 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type D100" (2.54mm) Mounting Type Through Hole Termination Kinked Pin, Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 20µin (0.51µm) Insulation Color Black Insulation Height 0.435" (11.05mm) Contact Length - Post 0.480" (12.19mm) Operating Temperature -55°C ~ 125°C	Contact Type	Forked	
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature55°C ~ 125°C	Style	Board to Board	
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorJ.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Contact Fungerature-55°C ~ 125°C	Number of Positions	26	
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All	
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (2.19mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2	
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Termination	Kinked Pin, Solder	
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold	
Insulation Height 0.435" (11.05mm) Contact Length - Post 0.480" (12.19mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	20µin (0.51µm)	
Contact Length - Post 0.480" (12.19mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.435" (11.05mm)	
	Contact Length - Post	0.480" (12.19mm)	
Material Flammability Rating UII 94 V-0	Operating Temperature	-55°C ~ 125°C	
	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

ESW-113-14-G-D-LL Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-113-14-G-D-LL Payment Methods

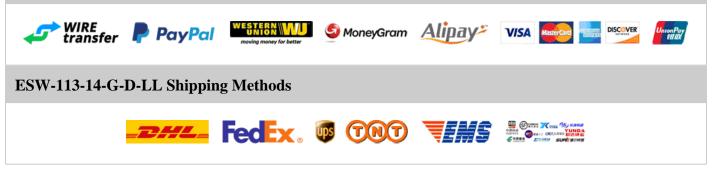

If you have any question about ESW-113-14-G-D-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com