

ESW-115-33-S-S-LL

ESW-115-33-S-S-LL Information

Heisener.com	Part Number Manufacturer Category	ESW-115-33-S-S-LL Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	ELEVATED SOCKET STRIPS	
For Reference Only	I ackage	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-115-33-S-S-LL Specifications

Manufacturer Part NumberESW-115-33-S-S-LLManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedSord to BoardSocketNumber of Positions15Number of Positions LoadedAllPich - Mating0.100° (2.54mm)Number of Rows1Rowspacing - MatingSinked Pin, SolderMouting TypeForkel HoleContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldState Finish - MatingGoldContact Finish Thickness - MatingGoldContact Lingth - PostGoldContact Lingth - PostGoldContact Lingth - Post<		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions15Number of Positions LoadedIntercemptionPitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows1Number of Rows1Number of Rows1Foreign LypeMiced Pin, SolderNumber of Rows6.30Strieng TypeSolderContact Finish - MatingGoldContact Finish Finkenes - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBlackInsulation Height0.000° (2.29mm)	Manufacturer Part Number	ESW-115-33-S-S-LL
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of PositionsI5Number of Positions CandedAllPich - Mating0.100° (2.54mm)Number of Rows1Rowspacing - MatingNone HeadersNumber of Rows0.100° (2.54mm)Number of Rows1Rowspacing - MatingNone HeadersNone of Rows1Streine TypeSocketNone of RowsSocketNone of Rows0.100° (2.54mm)Number of Rows1Streine TypeSocketNone of Rows1Streine TypeSocketNone of RowsSocketStreine TypeSocketStreine Type<	Manufacturer	Samtec Inc.
Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOldContact Finish - Mating3ujn (0.76µm)Contact Finish Thickness - Mating3ujn (0.76µm)Insulation Height0.635" (16.13mm)Contact Length - Post0.900" (2.29mm)	Category	Connectors, Interconnects
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFarening TypeOldGottact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening Type9ush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.655" (16.13mm)Contact Length - Post0.900" (2.29mm)	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFortninationKinked Pin, SolderFastening TypeOulContact Finish - MatingGoldContact Finish - MatingBlackInsulation ColorBlackInsulation Height0.090" (2.29mm)	Series	ESW
StyleBoard to BoardNumber of Positions15Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeGoldContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Connector Type	Elevated Socket
Number of Positions 15 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Kinked Pin, Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.635" (16.13mm) Contact Length - Post 0.00" (2.29mm)	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.900" (2.29mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationThrough HoleFastening TypePush-PullContact Finish - MatingOddSoluri (0.76µm)SlackInsulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Number of Positions	15
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJoµin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - PostJoµon" (2.29mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Number of Rows	1
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Termination	Kinked Pin, Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.635" (16.13mm)Contact Length - Post0.090" (2.29mm)	Contact Finish - Mating	Gold
Insulation Height 0.635" (16.13mm) Contact Length - Post 0.090" (2.29mm)	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post 0.090" (2.29mm)	Insulation Color	Black
-	Insulation Height	0.635" (16.13mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.090" (2.29mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESW-115-33-S-S-LL Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-115-33-S-S-LL Payment Methods

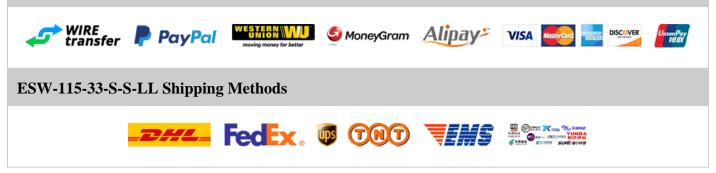

If you have any question about ESW-115-33-S-S-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com