

ESW-126-14-T-S

ESW-126-14-T-S Information

Heisener.com	Part Number Manufacturer	ESW-126-14-T-S Samtec Inc.	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	ELEVATED SOCKET STRIPS	
For Reference Only	T uchuge	For the pricing/inventory/lead time, please contact us	E134654524
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-126-14-T-S Specifications

Manufacturer Part NumberESW-126-14-T-SManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketConnector TypeForkedStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows1Forking TypePinchy HoleKow Spacing - MatingSolderFortact Finish - MatingSolderContact Finish - Mating-Contact Finish - Mating-Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Fleipt0.435° (11.05mm)Contact Length - Post0.480° (12.19mm)Contact Finish Proter10.00°C		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContac TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderNumber of Rows1String DypeSolderNumber of RowsSolderNumber of RowsSolderNumber of RowsSolderNumber of RowsSolderString TypeSolderString Type <t< td=""><td>Manufacturer Part Number</td><td>ESW-126-14-T-S</td></t<>	Manufacturer Part Number	ESW-126-14-T-S
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeOlderTerminationSolderFortact Finish - Mating-Contact Finish - Mating-Contact Finish - Mating-Insulation ColorInsulationInsulation Forsi-Insulation Finish - Mating-Contact Finish Thickness - Mating-Insulation FlostBlackInsulation Flost0.435° (11.05mm)Contact Length - Post0.480° (12.19mm)Contact Length - Post0.480° (12.19mm)	Manufacturer	Samtec Inc.
Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (22.19mm)Operating Temperature-55°C ~ 105°C	Category	Connectors, Interconnects
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleYoundation TypeSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Color0.435" (1.05mm)Contact Finish - Post0.480" (2.19mm)Contact Fungt - Post0.58°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.435° (11.05mm)Contact Length - Post-Operating Temperature-55° C~ 105°C	Package	-
Contact Type Forked Style Board to Board Number of Positions 26 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Number of Rows 1 Nouting Type - Mounting Type Solder Fastening Type Solder Contact Finish - Mating - Contact Finish - Mating Solder Insulation Color Black Insulation Height 0.435" (11.05mm) Contact Length - Post 0.480" (2.19mm)	Series	ESW
StyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Connector Type	Elevated Socket
Number of Positions26Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (2.19mm)Operating Temperature-55°C ~ 105°C	Number of Positions	26
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Mounting Type	Through Hole
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.435" (11.05mm)Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Contact Finish - Mating	Tin
Insulation Height 0.435" (11.05mm) Contact Length - Post 0.480" (12.19mm) Operating Temperature -55°C ~ 105°C	Contact Finish Thickness - Mating	-
Contact Length - Post0.480" (12.19mm)Operating Temperature-55°C ~ 105°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 105^{\circ}C$	Insulation Height	0.435" (11.05mm)
	Contact Length - Post	0.480" (12.19mm)
Metarial Flommahility Dating UI 04 V 0	Operating Temperature	$-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Material Fianmaonity Kating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

ESW-126-14-T-S Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-126-14-T-S Payment Methods

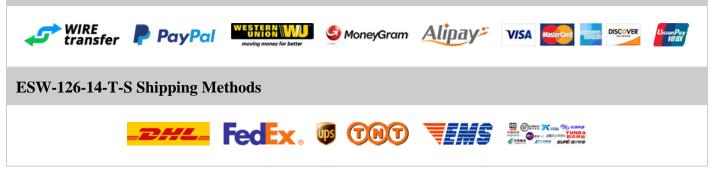

If you have any question about ESW-126-14-T-S, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com